

RR 6857 E

2008
Power Transmission Products Industry
List of Dimensions







Table of Contents

PROGRAM 10 - ROFLEX RE-X Narrow Section Raw-Edge V-Belts	2
PROGRAM 11 - ROFLEX Narrow Section Wrapped V-Belts	4
PROGRAM 12 - ROFLEX-X Narrow Section Raw-Edge V-Belts	6
PROGRAM 15 - ROFLEX Classical Section Wrapped V-Belts	8
PROGRAM 16 - ROFLEX-X Classical Section Raw-Edge V-Belts	12
PROGRAM 17 - ROFLEX RE-X Classical Section Raw-Edge V-Belts	14
PROGRAM 21 - ROFLEX Double-Sided V-Belts	15
PROGRAM 23 - ROFLEX Banded V-Belts	17
PROGRAM 33 - ROFLEX Multiribbed Belts	20
PROGRAM 34 - RO-DRIVE Synchronous Belts	22
PROGRAM 34 - RO-DRIVE TORQUE Synchronous Belts	26
PROGRAM 34 - RO-DRIVE PLUS Synchronous Belts	27
PROGRAM 34 - RO-DRIVE TWIN PLUS Double-Sided Synchronous Belts	30
PROGRAM 34 - RO-DRIVE TWIN Double-Sided Synchronous Belts	32
PROGRAM 34 - RO-DRIVE Open Ended Synchronous Belts	34
PROGRAM 40 - ROFLEX-VARI Raw-Edge Cogged Belts	35
CROSS LISTS	39



ROFLEX RE-X Narrow Section Raw-Edge V-Belts



SECTION	ISO 4184, BS 3790 DIN 7753/1 RMA/MTPA IP-22	XPZ	XPA	XPB	XPC	3VX/9NX	5VX/15NX
Belt width (top)	b_o [mm] \approx	9,7	12,7	16,3	22	9	15
Datum width	b_r [mm]	8,5	11	14	19		
Belt thickness	h [mm] \approx	8	9	13	18	8	13
Datum length	$L_r \approx L_e$ - [mm]					4	11
Inner length	$L_i \approx L_r$ - [mm]	37	45	60	69		
Outer length	$L_a \approx L_r$ - [mm]	13	18	22	30		
Minimum datum pulley diameter	d_r [mm]	50	63	100	160		
Weight	[kg/m] \approx	0,065	0,105	0,190	0,325		
Maximum bending frequency	f [Hz]	120					
Recommended maximum belt speed	v [m/s]	50					

* On request



Section XPZ / 3VX

L_r (mm)	L_r (inch)
562	22,13
587	23,11
612	24,09
630	24,80 3VX 250
637	25,08
662	26,06 3VX 260
670	26,38 3VX 265
687	27,05
710	27,95 3VX 280
722	28,43
737	29,02
750	29,53
762	30,00 3VX 300
772	30,39
780	30,71
787	30,98
795	31,30
800	31,50 3VX 315
812	31,97
825	32,48
837	32,95
850	33,46 3VX 335
862	33,94
875	34,45
887	34,92 3VX 350
900	35,43 3VX 355
912	35,91
925	36,42
930	36,61
937	36,89 3VX 370
950	37,40 3VX 375
962	37,87
987	38,86
1000	39,37
1012	39,84 3VX 400
1024	40,31
1037	40,83
1047	41,22
1060	41,73
1077	42,40 3VX 425
1087	42,80
1112	43,78
1120	44,09
1137	44,76 3VX 450
1150	45,28
1162	45,75
1180	46,46
1187	46,73

Section XPZ / 3VX

L_r (mm)	L_r (inch)
1200	47,24 3VX 475
1202	47,32 3VX 475
1212	47,72
1237	48,70
1250	49,21
1262	49,68 3VX 500
* 1270	50,00
1287	50,67
1312	51,65
1320	51,97 3VX 520
1337	52,64
1340	52,76 3VX 530
1347	53,03
1362	53,62
1387	54,61
1400	55,12
1412	55,59
1420	55,91 3VX 560
1437	56,57
1462	57,56
1487	58,54
1500	59,06
1512	59,53
1520	59,84 3VX 600
1537	60,51
1550	61,02
1562	61,50 3VX 617
1587	62,48
1600	62,99 3VX 630
1612	63,46
1637	64,45
1650	64,96
1662	65,43
1687	66,42
1700	66,93 3VX 670
* 1737	68,39
1750	68,90
1762	69,37
1787	70,35
1800	70,87 3VX 710
* 1812	71,34
1837	72,32
1850	72,83
1862	73,31
1887	74,29
1900	74,80 3VX 750
1937	76,26
1950	76,77

Section XPZ / 3VX

L_r (mm)	L_r (inch)
1987	78,23
2000	78,74
2037	80,20 3VX 800
2060	81,10
2120	83,46
2137	84,13
2160	85,04 3VX 850
2187	86,10
2240	88,19
2287	90,04 3VX 900
2360	92,91
2410	94,88 3VX 950
* 2437	95,94
2500	98,43
2540	100,00 3VX 1000
2650	104,33
2685	105,71 3VX 1060
2800	110,24
2840	111,81 3VX 1120
3000	118,11 3VX 1180
3150	124,02
3170	124,80 3VX 1250
3350	131,89 3VX 1320
3550	139,76 3VX 1400

Section XPA

L_r (mm)	L_r (inch)
1032	40,63
1060	41,73
1082	42,60
1107	43,58
1120	44,09
1132	44,57
1150	45,28
1157	45,55
1180	46,46
1207	47,52
1232	48,50
1250	49,21
1257	49,49
1272	50,08
1282	50,47
1307	51,46
1320	51,97
1332	52,44
1357	53,43
1382	54,41
1400	55,12
1407	55,39
1432	56,38
1450	57,09
1457	57,36
1482	58,35
1500	59,06
1507	59,33
1532	60,31
1550	61,02
1557	61,30
1582	62,28
1600	62,99
1607	63,27
1632	64,25
1650	64,96
1657	65,24
1682	66,22
1700	66,93
* 1725	67,91
1732	68,19
1750	68,90
1757	69,17
1782	70,16
1800	70,87
1807	71,14
1832	72,13
1850	72,83

Section XPA

L_r (mm)	L_r (inch)
732	28,82
757	29,80
782	30,79
800	31,50
807	31,77
832	32,76
850	33,46
857	33,74
882	34,72
900	35,43
907	35,71
925	36,42
932	36,69
950	37,40
957	37,68
967	38,07
975	38,39
982	38,66
1000	39,37
1007	39,65

ROFLEX RE-X Narrow Section Raw-Edge V-Belts

Section XPA

L _r (mm)	L _r (inch)
1857	73,11
1882	74,09
1900	74,80
1907	75,08
1932	76,06
1950	76,77
1957	77,05
* 1970	77,56
1982	78,03
2000	78,74
* 2020	79,53
2032	80,00
2057	80,98
2082	81,97
2120	83,46
2132	83,94
2160	85,04
2182	85,91
2207	86,89
2240	88,19
2282	89,84
2300	90,55
2307	90,83
2332	91,81
2360	92,91
2382	93,78
2432	95,75
2482	97,72
2500	98,43
2532	99,68
2582	101,65
* 2607	102,64
2632	103,62
2650	104,33
2682	105,59
2732	107,56
2782	109,53
2800	110,24
2832	111,50
2882	113,46
2932	115,43
* 2982	117,40
3000	118,11
* 3032	119,37
* 3082	121,34
3150	124,02
3182	125,28
3250	127,95
* 3282	129,21
3350	131,89
* 3382	133,15
3450	135,83
3550	139,76
* 3650	143,70
3750	147,64
* 3800	149,61
* 3850	151,57
* 3900	153,54
* 3950	155,51
4000	157,48
4250	167,32
4500	177,17

Section XPB / 5VX

L _r (mm)	L _r (inch)
* 1043	41,06
1250	49,21
1260	49,61 5VX 500
* 1270	50,00
1285	50,59
1320	51,97
1340	52,76 5VX 530
1350	53,15
1360	53,54
1400	55,12
1410	55,51 5VX 560
1440	56,69
1450	57,09
1470	57,87
1500	59,06 5VX 600
1525	60,04
1550	61,02
1590	62,60
1600	62,99 5VX 630
1610	63,39
1640	64,57
1650	64,96
1690	66,54
1700	66,93 5VX 670
1750	68,90
1780	70,08
1800	70,87 5VX 710
1850	72,83 5VX 730
1900	74,80 5VX 750
1950	76,77
2000	78,74
2020	79,53 5VX 800
2050	80,71
2060	81,10
2080	81,89
* 2100	82,68
2120	83,46 5VX 840
2150	84,65 5VX 850
2180	85,83
2240	88,19
* 2270	89,37
2285	89,96 5VX 900
2300	90,55
2360	92,91
* 2400	94,49
2410	94,88 5VX 950
2430	95,67
2450	96,46
2500	98,43
2530	99,61 5VX 1000
2580	101,57
2630	103,54
2650	104,33
2680	105,51 5VX 1060
2710	106,69
2730	107,48 5VX 1080
2800	110,24
2840	111,81 5VX 1120
2900	114,17
3000	118,11 5VX 1180
3150	124,02
3170	124,80 5VX 1250
* 3210	126,38
3250	127,95
3350	131,89 5VX 1320
3450	135,83
3550	139,76 5VX 1400
3650	143,70

Section XPB / 5VX

L _r (mm)	L _r (inch)
3750	147,64
3800	149,61 5VX 1500
3870	152,36
* 3950	155,51
4000	157,48
4060	159,84 5VX 1600
4120	162,20
* 4150	163,39
4250	167,32
4310	169,68 5VX 1700
4370	172,05
4500	177,17
4560	179,53 5VX 1800
4620	181,89
4750	187,01
4820	189,76 5VX 1900
5000	196,85


Section XPC

L _r (mm)	L _r (inch)
* 1792	70,55
1900	74,80
2000	78,74
2120	83,46
2240	88,19
2280	89,76
2360	92,91
2500	98,43
2650	104,33
2800	110,24
3000	118,11
3150	124,02
3350	131,89
3550	139,76
3650	143,70
3750	147,64
4000	157,48
* 4060	159,84
4100	161,42
4250	167,32
4310	169,68
4500	177,17
4750	187,01
5000	196,85





ROFLEX Narrow Section Wrapped V-Belts



SECTION	ISO 4184, BS 3790 DIN 7753/1 RMA/MTPA IP-22	SPZ	SPA	SPB	SPC	19*	3V/9N	5V/ 15N	8V/ 25N
Belt width (top)	b_o [mm] \approx	9,7	12,7	16,3	22	18,6	9	15	25
Datum width	b_r [mm]	8,5	11	14	19	16			
Belt thickness	h [mm] \approx	8	10	13	18	15	8	13	23
Datum length	$L_r \approx L_e$ [mm]						4	11	16
Inner length	$L_i \approx L_r$ [mm]	37	45	60	83	69			
Outer length	$L_a \approx L_r$ [mm]	13	18	22	30	25			
Minimum datum pulley diameter	d_r [mm]	63	90	140	224	180			
Weight	[kg/m] \approx	0,065	0,115	0,200	0,350	0,275			0,520
Maximum bending frequency	f [Hz]	100							
Recommended maximum belt speed	v [m/s]	42							

* On request



Section SPZ / 3V

L_r (mm)	L_r (inch)
512	20,16
562	22,13
587	23,11
612	24,09
630	24,80 3V 250
637	25,08
662	26,06 3V 260
670	26,38 3V 265
687	27,05
710	27,95 3V 280
737	29,02
750	29,53
762	30,00 3V 300
772	30,39
780	30,71
787	30,98
800	31,50 3V 315
812	31,97
825	32,48
837	32,95
850	33,46 3V 335
862	33,94
875	34,45
887	34,92 3V 350
900	35,43 3V 355
912	35,91
925	36,42
937	36,89 3V 370
950	37,40 3V 375
962	37,87
987	38,86
1000	39,37
1012	39,84 3V 400
1024	40,31
1037	40,83
1047	41,22
1060	41,73
1077	42,40 3V 425
1087	42,80
1112	43,78
1120	44,09
1137	44,76 3V 450
1150	45,28
* 1151	45,31
1162	45,75
1180	46,46
1187	46,73

Section SPZ / 3V

L_r (mm)	L_r (inch)	
1202	47,32	3V 475
1212	47,72	
1237	48,70	
1250	49,21	
1262	49,68	
1270	50,00 3V 500	
1287	50,67	
1312	51,65	
1320	51,97 3V 520	
1337	52,64	
1347	53,03	
1362	53,62	
1387	54,61	
1400	55,12	
1412	55,59	
1420	55,91 3V 560	
1437	56,57	
1462	57,56	
* 1470	57,87	
1487	58,54	
1500	59,06	
1512	59,53	
* 1520	59,84 3V 600	
1537	60,51	
1562	61,50	
1587	62,48	
1600	62,99 3V 630	
1612	63,46	
1637	64,45	
1650	64,96	
1662	65,43	
1687	66,42	
1700	66,93 3V 670	
1737	68,39	
1762	69,37	
1787	70,35	
1800	70,87 3V 710	
1812	71,34	
1837	72,32	
1850	72,83	
1862	73,31	
1887	74,29	
1900	74,80 3V 750	
1937	76,26	
1987	78,23	
2000	78,74	
2037	80,20 3V 800	

Section SPZ / 3V

L_r (mm)	L_r (inch)	
2087	82,17	
2120	83,46	
2137	84,13	
2160	85,04 3V 850	
2187	86,10	
2240	88,19	
* 2257	88,86	
2287	90,04 3V 900	
2360	92,91	
2410	94,88 3V 950	
2500	98,43	
2540	100,00 3V 1000	
2650	104,33	
* 2685	105,71	
2690	105,91 3V 1060	
* 2787	109,72	
2800	110,24	
2840	111,81 3V 1120	
3000	118,11 3V 1180	
3150	124,02	
* 3170	124,80	
3350	131,89 3V 1320	
3550	139,76 3V 1400	

Section SPA

L_r (mm)	L_r (inch)
1082	42,60
1107	43,58
1120	44,09
1132	44,57
1157	45,55
1180	46,46
1207	47,52
1232	48,50
1250	49,21
1257	49,49
1272	50,08
1282	50,47
1307	51,46
1320	51,97
1332	52,44
1357	53,43
1382	54,41
1400	55,12
1407	55,39
1432	56,38
1457	57,36
1482	58,35
1500	59,06
1507	59,33
1532	60,31
1557	61,30
1582	62,28
1600	62,99
1607	63,27
1632	64,25
* 1655	65,16
1657	65,24
1682	66,22
1700	66,93
1707	67,20
1732	68,19
1757	69,17
1782	70,16
1800	70,87
1807	71,14
1832	72,13
1857	73,11
1882	74,09
1900	74,80
1907	75,08
1932	76,06
1950	76,77

Section SPA

L_r (mm)	L_r (inch)
732	28,82
* 757	29,80
782	30,79
800	31,50
* 807	31,77
832	32,76
850	33,46
857	33,74
882	34,72
900	35,43
907	35,71
932	36,69
950	37,40
957	37,68
967	38,07
982	38,66
1000	39,37
1007	39,65
1032	40,63
1060	41,73

ROFLEX Narrow Section Wrapped V-Belts

Section SPA

L _r (mm)	L _r (inch)
1957	77,05
1982	78,03
2000	78,74
2020	79,53
2032	80,00
2057	80,98
* 2075	81,69
2082	81,97
2120	83,46
2132	83,94
2182	85,91
2207	86,89
2232	87,87
2240	88,19
2282	89,84
2300	90,55
2307	90,83
2332	91,81
2360	92,91
2382	93,78
2432	95,75
2482	97,72
2500	98,43
2532	99,68
2582	101,65
2607	102,64
2632	103,62
2650	104,33
2682	105,59
2732	107,56
2782	109,53
2800	110,24
2832	111,50
2847	112,09
2882	113,46
2900	114,17
2932	115,43
2982	117,40
3000	118,11
3032	119,37
3082	121,34
3150	124,02
3182	125,28
* 3250	127,95
3282	129,21
3350	131,89
3382	133,15
3450	135,83
* 3482	137,09
3550	139,76
* 3650	143,70
3750	147,64
4000	157,48
4250	167,32
4500	177,17

Section SPB / 5V

L _r (mm)	L _r (inch)
1250	49,21
* 1260	49,61
1320	51,97
1400	55,12
* 1440	56,69
1450	57,09
1500	59,06
1600	62,99
1700	66,93

Section SPB / 5V

L _r (mm)	L _r (inch)
1750	68,90
1800	70,87
1850	72,83
1900	74,80
1950	76,77
2000	78,74
2020	79,53
2030	79,92
* 2032	80,00
2060	81,10
2120	83,46
2150	84,65
2180	85,83
2240	88,19
2285	89,96
* 2330	91,73
2360	92,91
2410	94,88
2430	95,67
2500	98,43
2530	99,61
2540	100,00
2580	101,57
2600	102,36
2650	104,33
2680	105,51
2730	107,48
2760	108,66
2800	110,24
2840	111,81
* 2850	112,20
2900	114,17
2950	116,14
3000	118,11
3070	120,87
3082	121,34
3150	124,02
3170	124,80
3250	127,95
3320	130,71
3350	131,89
3400	133,86
3425	134,84
3450	135,83
3500	137,80
3550	139,76
3650	143,70
3675	144,68
3750	147,64
3800	149,61
3825	150,59
3870	152,36
4000	157,48
4060	159,84
4120	162,20
4250	167,32
4310	169,68
4370	172,05
* 4400	173,23
4500	177,17
4560	179,53
4620	181,89
4750	187,01
4820	189,76
4870	191,73
5000	196,85
* 5070	199,61
5080	200,00

Section SPB / 5V

L _r (mm)	L _r (inch)
5300	208,66
5385	212,01
5600	220,47
5680	223,62
6000	236,22
6300	248,03
6700	263,78
7100	279,53
7500	295,28
8000	314,96

Section SPC

L _r (mm)	L _r (inch)
2000	78,74
2120	83,46
2240	88,19
2360	92,91
2500	98,43
2650	104,33
2800	110,24
3000	118,11
3150	124,02
3350	131,89
3500	137,80
3550	139,76
3750	147,64
4000	157,48
4100	161,42
4250	167,32
4380	172,44
* 4400	173,23
4500	177,17
4750	187,01
5000	196,85
5300	208,66
5440	214,17
* 5450	214,57
5600	220,47
6000	236,22
* 6050	238,19
6300	248,03
6700	263,78
7100	279,53
7500	295,28
8000	314,96
8500	334,65
9000	354,33
9500	374,02
10000	393,70
10600	417,32
11200	440,94
11800	464,57
12500	492,13
* 13800	543,31

Section 8V

L _r (mm)	L _r (inch)
8V 1700	
8V 1800	
8V 1900	
8V 2000	
8V 2120	
8V 2240	
8V 2360	
8V 2500	
8V 2650	
8V 2800	
8V 3000	
8V 3150	
8V 3350	
8V 3550	
8V 3750	
8V 4000	
8V 4250	
8V 4500	
* 8V 4750	
* 8V 5000	


Section 8V

L _r (mm)	L _r (inch)
8V 1000	
8V 1060	
8V 1120	
8V 1180	
8V 1250	
8V 1320	
8V 1400	
8V 1500	
8V 1600	





ROFLEX-X Narrow Section Raw-Edge V-Belts



SECTION	ISO 4184, BS 3790 DIN 7753/1 RMA/MTPA IP-22	XPZ	XPA	XPB	XPC	3VX/9NX	5VX/ 15NX
Belt width (top)	b_o [mm] \approx	9,7	12,7	16,3	22	9	15
Datum width	b_r [mm]	8,5	11	14	19		
Belt thickness	h [mm] \approx	8	9	13	18	8	13
Datum length	$L_r \approx L_e$ - [mm]					4	11
Inner length	$L_i \approx L_r$ - [mm]	37	45	60	69		
Outer length	$L_a \approx L_r$ - [mm]	13	18	22	30		
Minimum datum pulley diameter	d_r [mm]	50	63	100	160		
Weight	[kg/m] \approx	0,065	0,105	0,190	0,325		
Maximum bending frequency	f [Hz]	120					
Recommended maximum belt speed	v [m/s]	50					

* On request



Section XPZ / 3VX

L_r (mm)	L_r (inch)
562	22,13
587	23,11
612	24,09
630	24,80 3VX 250
* 637	25,08
662	26,06 3VX 260
670	26,38 3VX 265
687	27,05
710	27,95 3VX 280
722	28,43
737	29,02
750	29,53
762	30,00 3VX 300
772	30,39
780	30,71
787	30,98
* 795	31,30
800	31,50 3VX 315
812	31,97
825	32,48
837	32,95
850	33,46 3VX 335
862	33,94
875	34,45
887	34,92 3VX 350
900	35,43 3VX 355
912	35,91
925	36,42
* 930	36,61
937	36,89
950	37,40 3VX 375
962	37,87
987	38,86
1000	39,37
1010	39,76 3VX 400
1012	39,84 3VX 400
* 1024	40,31
1037	40,83
* 1047	41,22
1060	41,73
* 1075	42,32
1077	42,40 3VX 425
1087	42,80
1112	43,78
1120	44,09
1137	44,76 3VX 450

Section XPZ / 3VX

L_r (mm)	L_r (inch)
1150	45,28
1162	45,75
1180	46,46
1187	46,73
1200	47,24 3VX 475
1202	47,32 3VX 475
1212	47,72
1237	48,70
1250	49,21
1262	49,68 3VX 500
1270	50,00
1287	50,67
1312	51,65
1320	51,97 3VX 520
1337	52,64 3VX 530
1340	52,76
* 1347	53,03
1362	53,62
* 1387	54,61
1400	55,12
1412	55,59
1420	55,91 3VX 560
1437	56,57
1450	57,09
1462	57,56
* 1470	57,87
1487	58,54
1500	59,06
1512	59,53
1520	59,84 3VX 600
1537	60,51
1562	61,50 3VX 617
1587	62,48
1600	62,99 3VX 630
* 1612	63,46
1637	64,45
1662	65,43
1687	66,42
1700	66,93 3VX 670
1737	68,39
1762	69,37
* 1787	70,35
1800	70,87 3VX 710
* 1812	71,34
* 1837	72,32
1850	72,83

Section XPZ / 3VX

L_r (mm)	L_r (inch)
1862	73,31
* 1887	74,29
1900	74,80 3VX 750
* 1937	76,26
1950	76,77
* 1987	78,23
2000	78,74
* 2025	79,72
2037	80,20 3VX 800
2120	83,46
* 2137	84,13
2160	85,04 3VX 850
* 2187	86,10
* 2240	88,19
* 2280	89,76
2287	90,04 3VX 900
* 2360	92,91
2410	94,88 3VX 950
* 2500	98,43
2540	100,00
2650	104,33
2685	105,71
* 2800	110,24
* 2840	111,81
* 3000	118,11 3VX 1180
* 3150	124,02 3VX 1250
* 3350	131,89 3VX 1320
* 3550	139,76 3VX 1400

Section XPA

L_r (mm)	L_r (inch)
950	37,40
* 957	37,68
* 967	38,07
975	38,39
982	38,66
1000	39,37
* 1007	39,65
1032	40,63
1060	41,73
1082	42,60
1090	42,91
1107	43,58
1120	44,09
* 1132	44,57
1150	45,28
1157	45,55
1180	46,46
1207	47,52
1232	48,50
1250	49,21
1257	49,49
* 1272	50,08
1282	50,47
1307	51,46
1320	51,97
1332	52,44
1357	53,43
1382	54,41
1400	55,12
* 1407	55,39
1432	56,38
1450	57,09
1457	57,36
1482	58,35
1500	59,06
1507	59,33
1532	60,31
1550	61,02
1557	61,30
1582	62,28
1600	62,99
* 1607	63,27
1632	64,25
1650	64,96
1657	65,24
1682	66,22

Section XPA

L_r (mm)	L_r (inch)
* 732	28,82
757	29,80
* 782	30,79
800	31,50
* 807	31,77
* 825	32,48
832	32,76
850	33,46
* 857	33,74
882	34,72
900	35,43
* 907	35,71
925	36,42
932	36,69

ROFLEX-X Narrow Section Raw-Edge V-Belts

Section XPA

L _r (mm)	L _r (inch)
1700	66,93
* 1732	68,19
1750	68,90
1757	69,17
1782	70,16
1800	70,87
* 1807	71,14
* 1832	72,13
1850	72,83
1857	73,11
* 1882	74,09
1900	74,80
* 1907	75,08
* 1932	76,06
1950	76,77
* 1957	77,05
* 1982	78,03
2000	78,74
* 2020	79,53
* 2032	80,00
2057	80,98
2082	81,97
2120	83,46
* 2132	83,94
2182	85,91
* 2207	86,89
2240	88,19
* 2282	89,84
2300	90,55
* 2307	90,83
* 2332	91,81
2360	92,91
* 2382	93,78
2432	95,75
* 2482	97,72
2500	98,43
* 2532	99,68
2582	101,65
* 2632	103,62
2650	104,33
* 2682	105,59
* 2732	107,56
* 2782	109,53
2800	110,24
* 2832	111,50
* 2847	112,09
* 2882	113,46
* 2932	115,43
* 2982	117,40
3000	118,11
* 3032	119,37
* 3082	121,34
3150	124,02
* 3182	125,28
* 3282	129,21
3350	131,89
* 3382	133,15
3550	139,76
3750	147,64
4000	157,48
* 4250	167,32
* 4500	177,17

Section XPB / 5VX

L _r (mm)	L _r (inch)
1250	49,21
1260	49,61 5VX 500
1320	51,97
1340	52,76 5VX 530
1400	55,12 5VX 560
1450	57,09
1500	59,06 5VX 600
1525	60,04
1550	61,02
1590	62,60
1600	62,99 5VX 630
1650	64,96
1700	66,93 5VX 670
1750	68,90
1800	70,87 5VX 710
1850	72,83
1900	74,80 5VX 750
1950	76,77
2000	78,74
2020	79,53 5VX 800
2120	83,46 5VX 840
2150	84,65 5VX 850
2180	85,83
2240	88,19
2285	89,96 5VX 900
* 2300	90,55
2360	92,91
* 2400	94,49
2410	94,88 5VX 950
* 2450	96,46
2500	98,43
2530	99,61 5VX 1000
* 2630	103,54
2650	104,33
2680	105,51 5VX 1060
2730	107,48 5VX 1080
2800	110,24
2840	111,81 5VX 1120
2900	114,17
3000	118,11 5VX 1180
3150	124,02 5VX 1250
3170	124,80
* 3210	126,38
3250	127,95
3350	131,89 5VX 1320
3550	139,76 5VX 1400
3750	147,64
3800	149,61 5VX 1500
4000	157,48
4060	159,84 5VX 1600
4250	167,32
* 4310	169,68 5VX 1700
4500	177,17
4750	187,01
* 4820	189,76 5VX 1900
5000	196,85

Section XPC


L _r (mm)	L _r (inch)
2000	78,74
2120	83,46
2240	88,19
2360	92,91
2500	98,43
2650	104,33
2800	110,24
3000	118,11

Section XPC

L _r (mm)	L _r (inch)
3150	124,02
3350	131,89
3550	139,76
3750	147,64
4000	157,48
4250	167,32
4500	177,17
4750	187,01
5000	196,85



ROFLEX Classical Section Wrapped V-Belts



SECTION	ISO 4184, BS 3790 DIN 2215 RMA/MTPA IP-20	8*	Z/10	A/13	B/17	20*	C/22	25*	D/32	E/40*
Belt width (top)	b_o [mm] \approx	8	10	13	17	20	22	25	32	40
Datum width	b_r [mm]	6,7	8,5	11	14	17	19	21	27	32
Belt thickness	T [mm] \approx	5	6	8	11	12,5	14	16	20	25
Datum length	$L_r \approx L_i +$ [mm]	19	22	30	43	48	65	61	69	84
Outer length	$L_a \approx L_i +$ [mm]	31	38	50	66	79	85	101	126	157
Minimum datum pulley diameter	d_d [mm]	40	50	63	100	140	160	224	280	450
Weight	[kg/m] \approx	0,040	0,058	0,104	0,172	0,239	0,282	0,366	0,591	0,958
Maximum bending frequency	f [Hz]	70								
Recommended maximum belt speed	v [m/s]	30								

* On request



Section Z / 10

RMA	L_i (mm)	L_r (mm)	L_i (inch)	L_r (inch)
14	356	378	14,02	14,88
15	381	403	15,00	15,87
15,7	399	421	15,71	16,57
16,7	425	447	16,73	17,60
17,7	450	472	17,72	18,58
18,5	470	492	18,50	19,37
19	483	505	19,02	19,88
19,5	495	517	19,49	20,35
20	508	530	20,00	20,87
20,5	521	543	20,51	21,38
21	530	552	20,87	21,73
21,7	551	573	21,69	22,56
22,2	564	586	22,20	23,07
23	584	606	22,99	23,86
24	610	632	24,02	24,88
24,7	630	652	24,80	25,67
25,7	653	675	25,71	26,57
26,5	673	695	26,50	27,36
27	686	708	27,01	27,87
28	710	732	27,95	28,82
29,5	749	771	29,49	30,35
30	762	784	30,00	30,87
30,5	775	797	30,51	31,38
30,7	780	802	30,71	31,57
31,5	800	822	31,50	32,36
32	813	835	32,01	32,87
33	838	860	32,99	33,86
33,7	856	878	33,70	34,57
35	889	911	35,00	35,87
35,5	902	924	35,51	36,38
36	914	936	35,98	36,85
36,5	927	949	36,50	37,36
37	940	962	37,01	37,87
37,5	953	975	37,52	38,39
38	965	987	37,99	38,86
39	990	1012	38,98	39,84
39,5	1003	1025	39,49	40,35
39,7	1008	1030	39,68	40,55
40,5	1029	1051	40,51	41,38
41	1041	1063	40,98	41,85
42	1067	1089	42,01	42,87
43	1090	1112	42,91	43,78
44	1120	1142	44,09	44,96
45	1143	1165	45,00	45,87
45,5	1156	1178	45,51	46,38
46,5	1180	1202	46,46	47,32
47,5	1207	1229	47,52	48,39
49	1245	1267	49,02	49,88

Section Z / 10

RMA	L_i (mm)	L_r (mm)	L_i (inch)	L_r (inch)
50	1270	1292	50,00	50,87
50,7	1288	1310	50,71	51,57
52	1320	1342	51,97	52,83
53	1346	1368	52,99	53,86
53,5 *	1360	1382	53,54	54,41
54	1372	1394	54,02	54,88
55	1400	1422	55,12	55,98
55,7	1415	1437	55,71	56,57
56,7 *	1440	1462	56,69	57,56
58	1475	1497	58,07	58,94
59	1500	1522	59,06	59,92
59,7 *	1516	1538	59,68	60,55
61	1550	1572	61,02	61,89
62	1575	1597	62,01	62,87
63	1600	1622	62,99	63,86
64	1625	1647	63,98	64,84
64,7	1643	1665	64,68	65,55
66	1675	1697	65,94	66,81
67	1700	1722	66,93	67,80
68	1725	1747	67,91	68,78
69	1750	1772	68,90	69,76
70	1775	1797	69,88	70,75
71	1800	1822	70,87	71,73
73	1854	1876	72,99	73,86
75	1900	1922	74,80	75,67
78	1981	2003	77,99	78,86
79	2007	2029	79,02	79,88
82	2083	2105	82,01	82,87
83 *	2108	2130	82,99	83,86
85	2160	2182	85,04	85,91
87 *	2210	2232	87,01	87,87
88	2235	2257	87,99	88,86
90	2286	2308	90,00	90,87
91	2311	2333	90,98	91,85
98 *	2489	2511	97,99	98,86

Section A / 13

RMA	L_i (mm)	L_r (mm)	L_i (inch)	L_r (inch)
16	407	437	16,02	17,20
18	457	487	17,99	19,17
18,7 *	475	505	18,70	19,88
19	480	510	18,90	20,08
20	508	538	20,00	21,18
21	535	565	21,06	22,24
21,7 *	551	581	21,69	22,87
22	560	590	22,05	23,23
23	584	614	22,99	24,17

Section A / 13

RMA	L_i (mm)	L_r (mm)	L_i (inch)	L_r (inch)
23,5	597	627	23,50	24,68
24	610	640	24,02	25,20
25	635	665	25,00	26,18
26	660	690	25,98	27,17
27	686	716	27,01	28,19
28	710	740	27,95	29,13
29	737	767	29,02	30,20
29,5 *	749	779	29,49	30,67
30	762	792	30,00	31,18
31	787	817	30,98	32,17
31,5 *	800	830	31,50	32,68
32	813	843	32,01	33,19
32,5 *	825	855	32,48	33,66
33	838	868	32,99	34,17
33,2 *	843	873	33,19	34,37
33,5 *	846	876	33,31	34,49
34	864	894	34,02	35,20
35	889	919	35,00	36,18
36	914	944	35,98	37,17
37	940	970	37,01	38,19
37,5	953	983	37,52	38,70
38	965	995	37,99	39,17
38,5	978	1008	38,50	39,68
39	990	1020	38,98	40,16
40	1016	1046	40,00	41,18
41	1041	1071	40,98	42,17
42	1067	1097	42,01	43,19
43	1090	1120	42,91	44,09
43,5 *	1105	1135	43,50	44,68
44	1120	1150	44,09	45,28
44,5 *	1130	1160	44,49	45,67
45	1143	1173	45,00	46,18
46	1168	1198	45,98	47,17
47	1194	1224	47,01	48,19
48	1220	1250	48,03	49,21
49	1245	1275	49,02	50,20
50	1270	1300	50,00	51,18
51	1295	1325	50,98	52,17
52	1320	1350	51,97	53,15
53	1350	1380	53,15	54,33
53,2 *	1351	1381	53,19	54,37
53,5 *	1359	1389	53,50	54,68
54	1372	1402	54,02	55,20
55	1400	1430	55,12	56,30
56	1422	1452	55,98	57,17
57	1450	1480	57,09	58,27
58	1473	1503	57,99	59,17
59	1500	1530	59,06	60,24

ROFLEX Classical Section Wrapped V-Belts

Section A / 13

RMA	L _i (mm)	L _r (mm)	L _i (inch)	L _r (inch)
60	1525	1555	60,04	61,22
61	1550	1580	61,02	62,20
62	1575	1605	62,01	63,19
63	1600	1630	62,99	64,17
64	1623	1653	63,90	65,08
65	1650	1680	64,96	66,14
66	1676	1706	65,98	67,17
67	1700	1730	66,93	68,11
68	1725	1755	67,91	69,09
69	1750	1780	68,90	70,08
70	1775	1805	69,88	71,06
71	1800	1830	70,87	72,05
72	1829	1859	72,01	73,19
73	1854	1884	72,99	74,17
74	1880	1910	74,02	75,20
75	1900	1930	74,80	75,98
76	1930	1960	75,98	77,17
77	1956	1986	77,01	78,19
78	1980	2010	77,95	79,13
79	2007	2037	79,02	80,20
80	2032	2062	80,00	81,18
81	2060	2090	81,10	82,28
82	2083	2113	82,01	83,19
83	2110	2140	83,07	84,25
84	2134	2164	84,02	85,20
85	2160	2190	85,04	86,22
86	2184	2214	85,98	87,17
87	2210	2240	87,01	88,19
88	2235	2265	87,99	89,17
89	2261	2291	89,02	90,20
90	2286	2316	90,00	91,18
91	2310	2340	90,94	92,13
92	2337	2367	92,01	93,19
93	2360	2390	92,91	94,09
94	2388	2418	94,02	95,20
95	2413	2443	95,00	96,18
96	2438	2468	95,98	97,17
97	2464	2494	97,01	98,19
98	2489	2519	97,99	99,17
99	2515	2545	99,02	100,20
100	2540	2570	100,00	101,18
102	2591	2621	102,01	103,19
103	2616	2646	102,99	104,17
104	2642	2672	104,02	105,20
105	2667	2697	105,00	106,18
106	2692	2722	105,98	107,17
107	2718	2748	107,01	108,19
108	2743	2773	107,99	109,17
109 *	2769	2799	109,02	110,20
110	2794	2824	110,00	111,18
111 *	2820	2850	111,02	112,20
112	2845	2875	112,01	113,19
113	2870	2900	112,99	114,17
114	2900	2930	114,17	115,35
116	2950	2980	116,14	117,32
118	3000	3030	118,11	119,29
119 *	3024	3054	119,05	120,24
120	3048	3078	120,00	121,18
124	3150	3180	124,02	125,20
127 *	3225	3255	126,97	128,15
128	3250	3280	127,95	129,13
130	3302	3332	130,00	131,18
132	3350	3380	131,89	133,07
134	3404	3434	134,02	135,20
136	3454	3484	135,98	137,17
138 *	3505	3535	137,99	139,17
140	3550	3580	139,76	140,94
142 *	3607	3637	142,01	143,19

Section A / 13

RMA	L _i (mm)	L _r (mm)	L _i (inch)	L _r (inch)
143 *	3632	3662	142,99	144,17
144	3658	3688	144,02	145,20
148	3759	3789	147,99	149,17
150 *	3810	3840	150,00	151,18
157 *	3988	4018	157,01	158,19
158	4013	4043	157,99	159,17
160 *	4064	4094	160,00	161,18
162	4115	4145	162,01	163,19
167	4242	4272	167,01	168,19
173	4394	4424	172,99	174,17
175 *	4445	4475	175,00	176,18
180	4572	4602	180,00	181,18
187 *	4750	4780	187,01	188,19
196	4978	5008	195,98	197,16
210	5334	5364	210,00	211,18
217 *	5512	5542	217,01	218,19

Section B / 17

RMA	L _i (mm)	L _r (mm)	L _i (inch)	L _r (inch)
23	584	627	22,99	24,68
26	660	703	25,98	27,68
27	686	729	27,01	28,70
28	710	753	27,95	29,65
29	737	780	29,02	30,71
30	762	805	30,00	31,69
31	787	830	30,98	32,68
32	813	856	32,01	33,70
32,5 *	826	869	32,52	34,21
33	838	881	32,99	34,68
34	864	907	34,02	35,71
35	889	932	35,00	36,69
35,7 *	907	950	35,71	37,40
36	914	957	35,98	37,68
36,7 *	932	975	36,69	38,39
37	940	983	37,01	38,70
37,5	953	996	37,52	39,21
38	965	1008	37,99	39,68
38,7 *	983	1026	38,70	40,39
39	990	1033	38,98	40,67
40	1016	1059	40,00	41,69
41	1041	1084	40,98	42,68
42	1067	1110	42,01	43,70
43	1090	1133	42,91	44,61
44	1120	1163	44,09	45,79
45	1143	1186	45,00	46,69
46	1168	1211	45,98	47,68
46,7 *	1186	1229	46,69	48,39
47	1194	1237	47,01	48,70
48	1219	1262	47,99	49,68
49	1245	1288	49,02	50,71
50	1270	1313	50,00	51,69
51	1295	1338	50,98	52,68
52	1320	1363	51,97	53,66
53	1350	1393	53,15	54,84
53,5 *	1359	1402	53,50	55,20
54	1372	1415	54,02	55,71
55	1400	1443	55,12	56,81
55,5 *	1410	1453	55,51	57,20
56	1422	1465	55,98	57,68
57	1450	1493	57,09	58,78
58	1473	1516	57,99	59,68
59	1500	1543	59,06	60,75
60	1525	1568	60,04	61,73
61	1550	1593	61,02	62,72
62	1575	1618	62,01	63,70
63	1600	1643	62,99	64,68
64	1625	1668	63,98	65,67

Section B / 17

RMA	L _i (mm)	L _r (mm)	L _i (inch)	L _r (inch)
65	1650	1693	64,96	66,65
66	1676	1719	65,98	67,68
66,2 *	1681	1724	66,18	67,87
66,5 *	1689	1732	66,50	68,19
67	1700	1743	66,93	68,62
67,2 *	1707	1747	67,20	68,78
68	1725	1768	67,91	69,61
69	1750	1793	68,90	70,59
69,2 *	1758	1801	69,21	70,91
70	1775	1818	69,88	71,57
71	1803	1846	70,98	72,68
72	1829	1872	72,01	73,70
73	1854	1897	72,99	74,68
74	1880	1923	74,02	75,71
75	1900	1943	74,80	76,50
76	1930	1973	75,98	77,68
77	1956	1999	77,01	78,70
78	1981	2024	77,99	79,68
79	2007	2050	79,02	80,71
80	2032	2075	80,00	81,69
81	2060	2103	81,10	82,80
82	2083	2126	82,01	83,70
83	2108	2151	82,99	84,68
84	2134	2177	84,02	85,71
85	2160	2203	85,04	86,73
86	2184	2227	85,98	87,68
87	2210	2253	87,01	88,70
88	2235	2278	87,99	89,68
89	2261	2304	89,02	90,71
90	2286	2329	90,00	91,69
91	2311	2354	90,98	92,68
92	2337	2380	92,01	93,70
93	2360	2403	92,91	94,61
94	2388	2431	94,02	95,71
95	2413	2456	95,00	96,69
96	2438	2481	95,98	97,68
97	2464	2507	97,01	98,70
98	2489	2532	97,99	99,68
99	2515	2558	99,02	100,71
100	2540	2583	100,00	101,69
101	2565	2608	100,98	102,68
102	2591	2634	102,01	103,70
103	2616	2659	102,99	104,68
104	2642	2685	104,02	105,71
105	2667	2710	105,00	106,69
106	2692	2735	105,98	107,68
107	2718	2761	107,01	108,70
108	2743	2786	107,99	109,68
109	2769	2812	109,02	110,71
110	2794	2837	110,00	111,69
112	2845	2888	112,01	113,70
112,5 *	2850	2893	112,20	113,90
113	2870	2913	112,99	114,68
114	2900	2943	114,17	115,87
115	2921	2964	115,00	116,69
116	2950	2993	116,14	117,83
117	2972	3015	117,01	118,70
118	3000	3043	118,11	119,80
120	3048	3091	120,00	121,69
122	3099	3142	122,01	123,70
124	3150	3193	124,02	125,71
125	3175	3218	125,00	126,69
126	3200	3243	125,98	127,68
127	3226	3269	127,01	128,70
128	3250	3293	127,95	129,65
130	3302	3345	130,00	131,69
132	3350	3393	131,89	133,58
133	3378	3421	132,99	134,68



ROFLEX Classical Section Wrapped V-Belts

Section B / 17

RMA	L _i (mm)	L _r (mm)	L _i (inch)	L _r (inch)
134	3404	3447	134,02	135,71
135	3429	3472	135,00	136,69
136	3450	3493	135,83	137,52
138	3505	3548	137,99	139,68
140	3550	3593	139,76	141,46
141 *	3581	3624	140,98	142,68
142	3607	3650	142,01	143,70
143 *	3632	3675	142,99	144,68
144	3658	3701	144,02	145,71
146	3708	3751	145,98	147,68
147 *	3734	3777	147,01	148,70
148	3759	3802	147,99	149,68
150	3810	3853	150,00	151,69
151	3835	3878	150,98	152,68
152	3861	3904	152,01	153,70
153 *	3886	3929	152,99	154,68
154	3912	3955	154,02	155,71
155 *	3937	3980	155,00	156,69
156	3962	4005	155,98	157,68
157	3988	4031	157,01	158,70
158	4013	4056	157,99	159,68
160	4064	4107	160,00	161,69
162	4115	4158	162,01	163,70
163	4140	4183	162,99	164,68
165	4191	4234	165,00	166,69
167	4242	4285	167,01	168,70
168	4267	4310	167,99	169,68
170	4318	4361	170,00	171,69
172 *	4369	4412	172,01	173,70
173	4394	4437	172,99	174,68
175	4445	4488	175,00	176,69
177	4500	4543	177,17	178,86
180	4572	4615	180,00	181,69
185	4699	4742	185,00	186,69
187	4750	4793	187,01	188,70
188	4775	4818	187,99	189,68
189 *	4800	4843	188,98	190,67
190	4826	4869	190,00	191,69
191	4851	4894	190,98	192,68
192	4877	4920	192,01	193,70
193	4900	4943	192,99	194,68
195	4953	4996	195,00	196,69
197	5000	5043	196,85	198,54
204	5182	5225	204,02	205,71
208	5283	5326	207,99	209,68
210 *	5334	5377	210,00	211,69
211 *	5359	5402	210,98	212,68
214 *	5436	5479	214,02	215,71
216 *	5486	5529	215,98	217,68
220	5588	5631	220,00	221,69
221 *	5613	5656	220,98	222,68
223	5664	5707	222,99	224,68
224 *	5689	5732	223,98	225,67
225	5715	5758	225,00	226,69
228	5791	5834	227,99	229,68
229 *	5817	5860	229,02	230,71
236 *	5995	6038	236,02	237,72
238 *	6045	6088	237,99	239,68
240	6096	6139	240,00	241,69
245 *	6223	6266	245,00	246,69
247 *	6274	6317	247,01	248,70
248	6300	6343	248,03	249,72
249 *	6325	6368	249,02	250,71
253 *	6426	6469	252,99	254,68
254 *	6452	6495	254,02	255,71
255 *	6477	6520	255,00	256,69
259 *	6579	6622	259,02	260,71
267 *	6782	6825	267,01	268,70

Section B / 17

RMA	L _i (mm)	L _r (mm)	L _i (inch)	L _r (inch)
269 *	6833	6876	269,02	270,71
270 *	6858	6901	270,00	271,69
275 *	6985	7028	275,00	276,69
276 *	7010	7053	275,98	277,68
280 *	7112	7156	280,00	281,73
285 *	7239	7282	285,00	286,69
299 *	7595	7638	299,02	300,71
300	7620	7663	300,00	301,69
315	8001	8044	315,00	316,69
330	8382	8425	330,00	331,69
345	8763	8806	345,00	346,69
360	9144	9187	360,00	361,69
394 *	10008	10051	394,01	395,71
433	10998	11041	432,99	434,68
472	11989	12032	472,01	473,70

Section C / 22

RMA	L _i (mm)	L _r (mm)	L _i (inch)	L _r (inch)
37 *	940	1005	37,01	39,57
39 *	1008	1073	39,68	42,24
41 *	1041	1106	40,98	43,54
42	1067	1132	42,01	44,57
43	1090	1155	42,91	45,47
44	1120	1185	44,09	46,65
45	1143	1208	45,00	47,56
46	1168	1233	45,98	48,54
47	1194	1259	47,01	49,57
48	1219	1284	47,99	50,55
49	1245	1310	49,02	51,57
50	1270	1335	50,00	52,56
51	1295	1360	50,98	53,54
52	1320	1385	51,97	54,53
53	1350	1415	53,15	55,71
54	1372	1437	54,02	56,57
55	1400	1465	55,12	57,68
56	1422	1487	55,98	58,54
57	1450	1515	57,09	59,65
58	1473	1538	57,99	60,55
58,5 *	1486	1551	58,50	61,06
59	1500	1565	59,06	61,61
60	1524	1589	60,00	62,56
61	1550	1615	61,02	63,58
62	1575	1640	62,01	64,57
63	1600	1665	62,99	65,55
63,2 *	1605	1670	63,19	65,75
64	1625	1690	63,98	66,54
65	1650	1715	64,96	67,52
66	1676	1741	65,98	68,54
67	1700	1765	66,93	69,49
68	1727	1792	67,99	70,55
69	1750	1815	68,90	71,46
70	1775	1840	69,88	72,44
71	1800	1865	70,87	73,43
72	1829	1894	72,01	74,57
73	1854	1919	72,99	75,55
74	1880	1945	74,02	76,57
75	1900	1965	74,80	77,36
76	1930	1995	75,98	78,54
77	1956	2021	77,01	79,57
78	1981	2046	77,99	80,55
79	2007	2072	79,02	81,57
80	2032	2097	80,00	82,56
81	2060	2125	81,10	83,66
82	2083	2148	82,01	84,57
83	2108	2173	82,99	85,55
84	2134	2199	84,02	86,57
85	2160	2225	85,04	87,60

Section C / 22

RMA	L _i (mm)	L _r (mm)	L _i (inch)	L _r (inch)
86	2184	2249	85,98	88,54
87	2210	2275	87,01	89,57
88	2235	2300	87,99	90,55
89	2261	2326	89,02	91,57
90	2286	2351	90,00	92,56
91	2311	2376	90,98	93,54
92	2337	2402	92,01	94,57
93	2360	2425	92,91	95,47
94	2388	2453	94,02	96,57
95	2413	2478	95,00	97,56
96	2438	2503	95,98	98,54
97	2464	2529	97,01	99,57
98	2489	2554	97,99	100,55
99	2515	2580	99,02	101,57
100	2540	2605	100,00	102,56
101	2565	2630	100,98	103,54
102	2591	2656	102,01	104,57
103	2616	2681	102,99	105,55
104	2642	2707	104,02	106,57
105	2667	2732	105,00	107,56
106	2692	2757	105,98	108,54
107	2718	2783	107,01	109,57
108	2743	2808	107,99	110,55
109	2769	2834	109,02	111,57
110	2794	2859	110,00	112,56
111	2819	2884	110,98	113,54
112	2845	2910	112,01	114,57
113	2870	2935	112,99	115,55
114	2900	2965	114,17	116,73
115	2921	2986	115,00	117,56
116	2950	3015	116,14	118,70
117	2972	3037	117,01	119,57
118	3000	3065	118,11	120,67
119	3033	3098	119,41	121,97
120	3048	3113	120,00	122,56
121	3073	3138	120,98	123,54
122	3099	3164	122,01	124,57
124	3150	3215	124,02	126,57
125	3175	3240	125,00	127,56
126	3200	3265	125,98	128,54
127	3226	3291	127,01	129,57
128	3250	3315	127,95	130,51
130	3302	3367	130,00	132,56
131 *	3327	3392	130,98	133,54
132	3350	3415	131,89	134,45
133	3378	3443	132,99	135,55
134	3404	3469	134,02	136,57
136	3450	3515	135,83	138,39
137	3480	3545	137,01	139,57
139	3531	3596	139,02	141,57
140	3550	3615	139,76	142,32
142	3607	3672	142,01	144,57
144	3658	3723	144,02	146,57
145	3683	3748	145,00	147,56
146	3708	3773	145,98	148,54
148	3759	3824	147,99	150,55
150	3810	3875	150,00	152,56
151 *	3835	3900	150,98	153,54
152	3861	3926	152,01	154,57
153 *	3886	3951	152,99	155,55
154	3912	3977	154,02	156,57
155 *	3937	4002	155,00	157,56
156	3962	4027	155,98	158,54
157	3988	4053	157,01	159,57
158	4013	4078	157,99	160,55
159	4038	4103	158,98	161,54
160	4064	4129	160,00	162,56
161 *	4089	4154	160,98	163,54



ROFLEX Classical Section Wrapped V-Belts

Section C / 22

RMA	L _i (mm)	L _r (mm)	L _i (inch)	L _r (inch)
162	4115	4180	162,01	164,57
163 *	4140	4205	162,99	165,55
164	4166	4231	164,02	166,57
166	4216	4281	165,98	168,54
167	4241	4306	166,97	169,53
168	4267	4332	167,99	170,55
170	4318	4383	170,00	172,56
172	4369	4434	172,01	174,57
173	4394	4459	172,99	175,55
175	4445	4510	175,00	177,56
177	4496	4561	177,01	179,57
180	4572	4637	180,00	182,56
182	4623	4688	182,01	184,57
184 *	4673	4738	183,98	186,54
186 *	4724	4789	185,98	188,54
187	4750	4815	187,01	189,57
188 *	4775	4840	187,99	190,55
190	4826	4891	190,00	192,56
193	4900	4965	192,91	195,47
194 *	4925	4990	193,90	196,46
195	4953	5018	195,00	197,56
197	5000	5065	196,85	199,41
198 *	5025	5090	197,83	200,39
200	5080	5145	200,00	202,56
202 *	5127	5192	201,85	204,41
204	5182	5247	204,02	206,57
206 *	5232	5297	205,98	208,54
208	5283	5348	207,99	210,55
210	5334	5399	210,00	212,56
211 *	5359	5424	210,98	213,54
212 *	5385	5450	212,01	214,57
213 *	5410	5475	212,99	215,55
215 *	5461	5526	215,00	217,56
216 *	5485	5550	215,94	218,50
220	5588	5653	220,00	222,56
223 *	5664	5729	222,99	225,55
224 *	5690	5755	224,02	226,57
225	5715	5780	225,00	227,56
228	5791	5856	227,99	230,55
229 *	5817	5882	229,02	231,57
230 *	5842	5901	230,00	232,32
236	5994	6059	235,98	238,54
238	6045	6110	237,99	240,55
240	6096	6161	240,00	242,56
248	6300	6365	248,03	250,59
250	6350	6415	250,00	252,56
252 *	6401	6466	252,01	254,57
255	6477	6542	255,00	257,56
256 *	6502	6567	255,98	258,54
260	6604	6669	260,00	262,56
261 *	6629	6694	260,98	263,54
264 *	6706	6771	264,02	266,57
268 *	6807	6872	267,99	270,55
270	6858	6923	270,00	272,56
276	7010	7075	275,98	278,54
280	7112	7177	280,00	282,56
282 *	7163	7228	282,01	284,57
285	7239	7304	285,00	287,56
298 *	7569	7634	297,99	300,55
300	7620	7685	300,00	302,56
303 *	7696	7761	302,99	305,55
314 *	7976	8041	314,02	316,57
315 *	8001	8066	315,00	317,56
316 *	8026	8091	315,98	318,54
320 *	8128	8193	320,00	322,56
323 *	8204	8269	322,99	325,55
328 *	8331	8396	327,99	330,55
330	8382	8447	330,00	332,56

Section C / 22

RMA	L _i (mm)	L _r (mm)	L _i (inch)	L _r (inch)
336 *	8534	8599	335,98	338,54
345 *	8763	8828	345,00	347,56
346 *	8788	8853	345,98	348,54
347 *	8814	8879	347,01	349,57
358 *	9093	9158	357,99	360,55
360	9144	9209	360,00	362,56
388 *	9855	9920	387,99	390,55
390	9906	9971	390,00	392,56
394	10008	10073	394,01	396,57
420	10668	10733	420,00	422,56
424 *	10770	10835	424,01	426,57
452 *	11481	11546	452,01	454,57
480 *	12192	12257	480,00	482,56

Section D / 32

RMA	L _i (mm)	L _r (mm)	L _i (inch)	L _r (inch)
93 *	2362	2431	92,99	95,71
94	2388	2457	94,02	96,73
98	2489	2558	97,99	100,71
101 *	2565	2634	100,98	103,70
104 *	2641	2710	103,98	106,69
105 *	2667	2736	105,00	107,72
108 *	2743	2812	107,99	110,71
110	2800	2869	110,24	112,95
115	2921	2990	115,00	117,72
118 *	2997	3066	117,99	120,71
120	3048	3117	120,00	122,72
121	3073	3142	120,98	123,70
124 *	3150	3219	124,02	126,73
125	3175	3244	125,00	127,72
126	3200	3269	125,98	128,70
128	3251	3320	127,99	130,71
130 *	3302	3371	130,00	132,72
132 *	3353	3422	132,01	134,72
133 *	3378	3447	132,99	135,71
134	3404	3473	134,02	136,73
135 *	3429	3498	135,00	137,72
136	3454	3523	135,98	138,70
140	3550	3619	139,76	142,48
143	3632	3701	142,99	145,71
144	3658	3727	144,02	146,73
145	3684	3752	145,04	147,72
148	3759	3828	147,99	150,71
150 *	3810	3879	150,00	152,72
152 *	3861	3930	152,01	154,72
154	3912	3981	154,02	156,73
156	3962	4031	155,98	158,70
157 *	3988	4057	157,01	159,72
158	4013	4082	157,99	160,71
159 *	4039	4108	159,02	161,73
160	4064	4133	160,00	162,72
162	4115	4184	162,01	164,72
163	4140	4209	162,99	165,71
165 *	4191	4260	165,00	167,72
167	4242	4311	167,01	169,72
169	4293	4362	169,02	171,73
173	4394	4463	172,99	175,71
175	4445	4514	175,00	177,72
177 *	4496	4565	177,01	179,72
180	4572	4641	180,00	182,72
184	4674	4743	184,02	186,73
195	4953	5022	195,00	197,72
197	5004	5073	197,01	199,72
205 *	5207	5276	205,00	207,72
207 *	5258	5327	207,01	209,72
209 *	5309	5379	209,02	211,77
210	5334	5403	210,00	212,72


Section D / 32

RMA	L _i (mm)	L _r (mm)	L _i (inch)	L _r (inch)
218	5537	5606	217,99	220,71
220	5588	5657	220,00	222,72
225	5715	5784	225,00	227,72
233 *	5918	5987	232,99	235,71
236	5994	6063	235,98	238,70
238 *	6045	6114	237,99	240,71
240	6096	6165	240,00	242,72
248	6300	6369	248,03	250,75
250	6350	6419	250,00	252,72
255	6477	6546	255,00	257,72
260 *	6604	6673	260,00	262,72
268 *	6807	6876	267,99	270,71
270	6858	6927	270,00	272,72
300	7620	7689	300,00	302,72
314 *	7676	7745	302,20	316,73
315	8001	8070	315,00	317,72
316 *	8026	8095	315,98	318,70
326 *	8280	8349	325,98	328,70
328 *	8331	8400	327,99	330,71
330	8382	8451	330,00	332,72
345 *	8763	8832	345,00	347,72
354 *	8992	9061	354,02	356,73
358 *	9093	9162	357,99	360,71
360	9144	9213	360,00	362,72
374 *	9500	9569	374,02	376,73
388 *	9855	9924	387,99	390,71
390	9906	9975	390,00	392,72
394 *	10008	10077	394,01	396,73
418 *	10617	10686	417,99	420,71
420 *	10668	10737	420,00	422,72
441	11201	11270	440,98	443,70
444 *	11278	11347	444,01	446,73
478 *	12141	12210	477,99	480,71
480	12192	12261	480,00	482,72
482 *	12243	12312	482,01	484,72
492 *	12497	12566	492,01	494,72





ROFLEX-X Classical Section Raw-Edge V-Belts



SECTION	ISO 4184, BS 3790 DIN 2215 ANSI/RMA IP-20	ZX / 10X	AX / 13X	BX / 17X	CX / 22X
Belt width (top)	b_o [mm] \approx	10	13	17	22
Datum width	b_r [mm]	8,5	11	14	19
Belt thickness	T [mm] \approx	6	8	11	14
Inner length	$L_i \approx L_r -$ [mm]	22	30	43	65
Outer length	$L_a \approx L_r +$ [mm]	16	20	23	20
Minimum datum pulley diameter	d_r [mm]	40	50	80	140
Weight	[kg/m] \approx	0,055	0,080	0,165	0,250
Maximum bending frequency	f [Hz]	120			
Recommended maximum belt speed	v [m/s]	50			

* On request



Section ZX / 10X

RMA	L_r (mm)	L_r (inch)
19	505	19,88
19,5	517	20,35
20	530	20,87
20,5	543	21,38
21	555	21,85
21,7	573	22,56
22,2	586	23,07
23	606	23,86
24	632	24,88
24,7	649	25,55
25,7	675	26,57
26	682	26,85
27	708	27,87
28	733	28,86
28,5	746	29,37
29,5	771	30,35
30	784	30,87
30,5	797	31,38
30,7	802	31,57
31,5	822	32,36
32	835	32,87
33	860	33,86
33,7	878	34,57
34,5 *	898	35,35
35	911	35,87
35,5 *	924	36,38
36	936	36,85
36,5 *	949	37,36
37	962	37,87
37,5 *	975	38,39
38	987	38,86
39	1013	39,88
39,5 *	1025	40,35
39,7 *	1030	40,55
40	1038	40,87
40,5 *	1051	41,38
41	1063	41,85
42	1089	42,87
43	1114	43,86
44	1140	44,88
45	1165	45,87
45,5 *	1178	46,38
46,5	1203	47,36
47,5	1229	48,39
49	1267	49,88
50 *	1292	50,87
50,7 *	1310	51,57
52	1343	52,87
53 *	1368	53,86

Section ZX / 10X

RMA	L_r (mm)	L_r (inch)
53,5 *	1381	54,37
54	1394	54,88
55	1419	55,87
55,7 *	1437	56,57
56,7 *	1462	57,56
58 *	1495	58,86
59 *	1521	59,88
59,7 *	1538	60,55
60 *	1546	60,87
61	1571	61,85
62	1597	62,87
63 *	1622	63,86
64 *	1648	64,88
64,7 *	1665	65,55
65 *	1673	65,87
66	1698	66,85
67 *	1724	67,87
68 *	1749	68,86
69 *	1775	69,88
70 *	1800	70,87
71 *	1825	71,85
73 *	1876	73,86
75 *	1927	75,87
78	2003	78,86
79 *	2029	79,88
80 *	2054	80,87
82 *	2105	82,87
85 *	2181	85,87
88 *	2257	88,86
90 *	2308	90,87
91 *	2333	91,85

Section AX / 13A

RMA	L_r (mm)	L_r (inch)
19	513	20,20
20	538	21,18
21	563	22,17
21,7 *	581	22,87
22	589	23,19
23	614	24,17
23,5 *	627	24,68
24	640	25,20
25	665	26,18
26	690	27,17
27	716	28,19
27,5 *	729	28,70
28	741	29,17
29	767	30,20

Section AX / 13A

RMA	L_r (mm)	L_r (inch)
29,5	780	30,71
30	792	31,18
31	817	32,17
31,5	830	32,68
32	843	33,19
32,5	856	33,70
33	868	34,17
33,2 *	873	34,37
34	894	35,20
34,5	906	35,67
35	919	36,18
36	944	37,17
37	970	38,19
37,5	983	38,70
38	995	39,17
38,5 *	1008	39,68
39	1021	40,20
40	1046	41,18
41	1071	42,17
42	1097	43,19
42,5	1110	43,70
43	1122	44,17
43,5 *	1135	44,68
44	1148	45,20
44,5	1160	45,67
45	1173	46,18
45,5 *	1185	46,65
46	1198	47,17
46,5 *	1210	47,64
47	1224	48,19
48	1249	49,17
49	1275	50,20
50	1300	51,18
51	1325	52,17
52	1351	53,19
53	1376	54,17
53,5 *	1389	54,68
54	1402	55,20
55	1427	56,18
56	1452	57,17
57	1478	58,19
58	1503	59,17
59	1529	60,20
60	1554	61,18
61	1579	62,17
62	1605	63,19
63	1630	64,17
64	1656	65,20
65	1681	66,18

Section AX / 13A

RMA	L_r (mm)	L_r (inch)
66	1706	67,17
67	1732	68,19
68	1757	69,17
69	1783	70,20
70	1808	71,18
71	1833	72,17
72	1859	73,19
73	1884	74,17
74	1910	75,20
75	1935	76,18
76	1960	77,17
77	1986	78,19
78	2011	79,17
79	2037	80,20
80	2062	81,18
81	2087	82,17
82	2113	83,19
83	2138	84,17
84	2164	85,20
85	2189	86,18
86	2214	87,17
87	2240	88,19
88	2265	89,17
89	2291	90,20
90	2316	91,18
91	2341	92,17
92	2367	93,19
93	2392	94,17
94	2418	95,20
95	2443	96,18
96	2468	97,17
97 *	2494	98,19
98	2519	99,17
99 *	2545	100,20
100	2570	101,18
102	2621	103,19
103 *	2646	104,17
104 *	2672	105,20
105	2697	106,18
106 *	2722	107,17
107 *	2748	108,19
108 *	2773	109,17
110 *	2824	111,18
112 *	2875	113,19
113 *	2900	114,17
114 *	2926	115,20
115 *	2951	116,18
116 *	2976	117,17
118 *	3027	119,17

ROFLEX-X Classical Section Raw-Edge V-Belts

Section AX / 13A

RMA	L _r (mm)	L _r (inch)
120 *	3078	121,18
124 *	3180	125,20
128 *	3281	129,17
130 *	3332	131,18
132 *	3383	133,19
134 *	3434	135,20
136	3484	137,17
138 *	3510	138,19
140 *	3586	141,18
144 *	3688	145,20
148	3789	149,17
158 *	4043	159,17
162 *	4145	163,19
173 *	4424	174,17
174 *	4450	175,20
180 *	4602	181,18

Section BX / 17X

RMA	L _r (mm)	L _r (inch)
64,5 *	1681	66,18
65	1694	66,69
66	1719	67,68
66,2 *	1724	67,87
66,5 *	1732	68,19
67	1745	68,70
67,2 *	1750	68,90
68	1770	69,68
69	1796	70,71
69,2 *	1800	70,87
70	1821	71,69
71	1846	72,68
72	1872	73,70
73	1897	74,68
74	1923	75,71
75	1948	76,69
76	1973	77,68
77	1999	78,70
78	2024	79,68
79	2050	80,71
80	2075	81,69
81	2100	82,68
82	2126	83,70
83	2151	84,68
84	2177	85,71
85	2202	86,69
86	2227	87,68
87	2253	88,70
88	2278	89,68
89	2304	90,71
90	2329	91,69
91	2354	92,68
92	2380	93,70
93	2405	94,68
94	2431	95,71
95	2456	96,69
96	2481	97,68
96,5 *	2494	98,19
97	2507	98,70
98	2532	99,68
99	2558	100,71
100	2583	101,69
101 *	2608	102,68
102	2634	103,70
103	2659	104,68
104	2685	105,71
105	2710	106,69
106	2735	107,68
107	2748	108,19
108	2786	109,68
109 *	2811	110,67
110	2837	111,69
112	2888	113,70
112,5 *	2901	114,21
113 *	2913	114,68
114 *	2939	115,71
115	2964	116,69
116	2989	117,68
117	3015	118,70
118	3040	119,68
120	3091	121,69
122	3142	123,70
124	3193	125,71
125 *	3218	126,69
126	3243	127,68
127 *	3269	128,70
128	3294	129,68
130	3345	131,69

Section BX / 17X

RMA	L _r (mm)	L _r (inch)
132 *	3396	133,70
133	3421	134,68
134	3447	135,71
135 *	3472	136,69
136	3497	137,68
138	3548	139,68
140	3599	141,69
144	3701	145,71
146 *	3751	147,68
148 *	3802	149,68
150 *	3853	151,69
152 *	3904	153,70
154	3955	155,71
155 *	3980	156,69
156 *	4005	157,68
157 *	4031	158,70
158 *	4056	159,68
162	4158	163,70
163 *	4183	164,68
165 *	4234	166,69
168	4310	169,68
173 *	4437	174,68
175 *	4488	176,69
180 *	4615	181,69
185 *	4742	186,69
187 *	4793	188,70
188 *	4818	189,68

Section CX / 22X

RMA	L _r (mm)	L _r (inch)
76	1995	78,54
77	2021	79,57
78	2046	80,55
79	2072	81,57
80	2097	82,56
81	2122	83,54
82	2148	84,57
83	2173	85,55
84	2199	86,57
85	2224	87,56
86	2249	88,54
87	2275	89,57
88	2300	90,55
89	2326	91,57
90	2351	92,56
91 *	2376	93,54
92 *	2402	94,57
93	2427	95,55
94 *	2453	96,57
95	2478	97,56
96	2503	98,54
97	2529	99,57
98	2554	100,55
99	2580	101,57
100	2605	102,56
101 *	2630	103,54
102	2656	104,57
103 *	2681	105,55
104 *	2707	106,57
105	2732	107,56
106	2757	108,54
107	2783	109,57
108	2808	110,55
109 *	2834	111,57
110	2859	112,56
111 *	2884	113,54
112	2910	114,57
113 *	2935	115,55
114 *	2961	116,57
115 *	2986	117,56
116 *	3011	118,54
117 *	3037	119,57
118	3062	120,55
120 *	3113	122,56
122 *	3164	124,57
124 *	3215	126,57
125 *	3240	127,56
126 *	3265	128,54
127 *	3291	129,57
128 *	3316	130,55
130 *	3367	132,56
132 *	3418	134,57
133 *	3443	135,55
134 *	3469	136,57
136	3519	138,54
137 *	3545	139,57
140 *	3621	142,56
144	3723	146,57
150 *	3875	152,56
158	4078	160,55
166 *	4281	168,54
173	4459	175,55
175 *	4510	177,56
180	4637	182,56
195	5018	197,56

Section BX / 17X

RMA	L _r (mm)	L _r (inch)
23	627	24,68
26	703	27,68
27	729	28,70
28	754	29,68
29	780	30,71
29,5 *	792	31,18
30	805	31,69
31	830	32,68
32	856	33,70
32,5 *	868	34,17
33	881	34,68
34	907	35,71
35	932	36,69
35,7 *	950	37,40
36	957	37,68
36,7	975	38,39
37	983	38,70
37,5 *	995	39,17
38	1008	39,68
38,7 *	1026	40,39
39	1034	40,71
40	1059	41,69
41	1084	42,68
42	1110	43,70
43	1135	44,68
44	1161	45,71
45	1186	46,69
46	1211	47,68
47	1237	48,70
48	1262	49,68
49	1288	50,71
50	1313	51,69
51	1338	52,68
52	1364	53,70
53	1389	54,68
53,5 *	1402	55,20
54	1415	55,71
55	1440	56,69
55,5 *	1453	57,20
56	1465	57,68
57	1491	58,70
58	1516	59,68
59	1542	60,71
60	1567	61,69
61	1592	62,68
62	1618	63,70
63	1643	64,68
64	1669	65,71


Section CX / 22X

RMA	L _r (mm)	L _r (inch)
38 *	1030	40,55
42	1132	44,57
43	1157	45,55
44	1183	46,57
45	1208	47,56
46	1233	48,54
47	1259	49,57
48	1284	50,55
49	1310	51,57
50	1335	52,56
51	1360	53,54
52	1386	54,57
53	1411	55,55
54	1437	56,57
55	1462	57,56
56	1487	58,54
57	1513	59,57
58	1538	60,55
58,5 *	1551	61,06
59	1564	61,57
60	1589	62,56
61	1614	63,54
62	1640	64,57
63	1665	65,55
63,2 *	1670	65,75
64	1691	66,57
65	1716	67,56
66	1741	68,54
67	1767	69,57
68	1792	70,55
69	1818	71,57
70	1843	72,56
71	1868	73,54
72	1894	74,57
73	1919	75,55
74	1945	76,57
75	1970	77,56





ROFLEX RE-X Classical Section Raw-Edge V-Belts



SECTION	ISO 4184, BS 3790 DIN 2215 ANSI/RMA IP-20	5/-	6/Y	8/-
Belt width (top)	b_o [mm] \approx	5	6	8
Datum width	b_r [mm]	4,2	5,3	6,7
Belt thickness	h [mm] \approx	3	4	5
Inner length	$L_i \approx L_r -$ [mm]	11	15	19
Outer length	$L_o \approx L_r +$ [mm]	8	10	12
Minimum datum pulley diameter	d_r [mm]	16	20	31,5
Weight	[kg/m] \approx	0,015	0,023	0,041
Maximum bending frequency	f [Hz]	120		
Recommended maximum belt speed	v [m/s]	50		

* On request
N: Plain version, non-cogged



Section 5/-

L_i (mm)	L_i (inch)
* 160	6,30
* N185	7,28
* N190	7,48
* N229	9,02
* N236	9,29
* N260	10,24
* N265	10,43
* 270	10,63
* 280	11,02
* N287	11,30
* 300	11,81
* N303	11,93
* 315	12,40
* 322	12,68
* N330	12,99
* 335	13,19
* 340	13,39
* N345	13,58
* N350	13,78
* 352	13,86
* N358	14,09
* 375	14,76
* 400	15,75
* N406	15,98
* N420	16,54
* 425	16,73
* N435	17,13
* N441	17,36
* 450	17,72
* N465	18,31
* N471	18,54
* N475	18,70
* N495	19,49
* N500	19,69
* N514	20,24
* 530	20,87
* N554	21,81
* 560	22,05
* 600	23,62


Section 6/Y

L_i (mm)	L_i (inch)
* N240	9,45
* N250	9,84
* N260	10,24
* N265	10,43
* 270	10,63
* 280	11,02
* 300	11,81
* 315	12,40
* N320	12,60
* N330	12,99
* 335	13,19
* 339	13,35
* N339	13,35
* N350	13,78
* 352	13,86
* N372	14,65
* 375	14,76
* N380	14,96
* 400	15,75
* 425	16,73
* 450	17,72
* 495	19,49
* N500	19,69
* 530	20,87
* N540	21,26
* N550	21,65
* 560	22,05
* N580	22,83
* 600	23,62
* N640	25,20
* 850	33,46
* N900	35,43

Section 8/-

L_i (mm)	L_i (inch)
* 160	6,30
* 280	11,02
* 300	11,81
* 315	12,40
* 322	12,68
* N335	13,19
* 340	13,39
* 355	13,98
* 375	14,76
* 400	15,75
* N430	16,93
* 450	17,72
* N475	18,70
* 495	19,49
* 530	20,87
* N560	22,05
* N580	22,83
* 600	23,62
* N630	24,80
* N655	25,79
* N670	26,38
* N680	26,77
* N700	27,56
* N710	27,95
* N717	28,23
* N750	29,53
* N800	31,50

ROFLEX Double-Sided V-Belts



SECTION	ASAE S 211.4DIN 7722, ISO 5289	HAA / AA	HBB / BB	HCC / CC	25 x 22
Width	W [mm] ≈	13	17	22	25
Datum width	W _r [mm]	11	14	19	21
Belt thickness	T [mm] ≈	10	13	17	22
Inner length (theoretical)	L _i ≈ L _e - [mm]	51	69	101	101
Inner length (physical)	L _i ≈ L _e - [mm]	31	41	53	69
Datum length	L _r ≈ L _e - [mm]	21	26	36	40
Outer length	L _a ≈ L _e + [mm]	31	41	53	69
Minimum effective diameter of smallest pulley	d _e [mm]	80	125	224	280
Weight	[kg/m] ≈	0,140	0,244	0,409	0,590
Maximum bending frequency	f [Hz]	60			
Recommended maximum belt speed	v [m/s]	30			

* On request

Section HAA / AA

RMA	L _e (mm)	L _r (mm)	L _e (inch)	L _r (inch)
75	1956		77,01	
77	1996		78,58	
78	2032		80,00	
80	2074		81,65	
85	2210		87,01	
88	2286		90,00	
91	2362		92,99	
93 *	2413		95,00	
96	2489		97,99	
100 *	2591		102,01	
102 *	2642		104,02	
103 *	2667		105,00	
105	2718		107,01	
108	2794		110,00	
112	2896		114,02	
116	2997		117,99	
120	3099		122,01	
126 *	3251		127,99	
128 *	3302		130,00	
130	3353		132,01	
134 *	3455		136,02	
136 *	3505		137,99	
146 *	3759		147,99	
148	3810		150,00	
152	3912		154,02	
156 *	4013		157,99	
157 *	4039		159,02	
158 *	4064		160,00	
163	4191		165,00	
164 *	4217		166,02	
165 *	4242		167,01	
166 *	4267		167,99	
176 *	4521		177,99	
178 *	4572		180,00	
185 *	4750		187,01	
195 *	5004		197,01	

Section HBB / BB

RMA	L _e (mm)	L _r (mm)	L _e (inch)	L _r (inch)
79 *	2076		81,73	
80	2101		82,72	
81	2126		83,70	
82	2129		83,82	
83	2177		85,71	
84	2203		86,73	
85 *	2228		87,72	
86 *	2253		88,70	
88 *	2304		90,71	
89	2327		91,61	
90	2355		92,72	
91	2380		93,70	
92 *	2406		94,72	
93	2431		95,71	
94	2457		96,73	
95	2482		97,72	
96	2507		98,70	
97	2533		99,72	
98	2558		100,71	
100	2609		102,72	
101	2634		103,70	
102 *	2660		104,72	
104 *	2705		106,50	
105	2736		107,72	
106	2762		108,74	
107 *	2788		109,76	
108	2812		110,71	
110	2863		112,72	
111	2888		113,70	
112	2914		114,72	
113	2939		115,71	
115	2990		117,72	
116	3015		118,70	
117	3041		119,72	
118	3066		120,71	
119	3092		121,73	
120	3117		122,72	
121	3142		123,70	
122	3168		124,72	
123	3193		125,71	
124	3219		126,73	
125	3244		127,72	
126	3269		128,70	
127	3295		129,72	
128	3320		130,71	

Section HBB / BB

RMA	L _e (mm)	L _r (mm)	L _e (inch)	L _r (inch)
129 *	3346		131,73	
130	3371		132,72	
131	3396		133,70	
133	3447		135,71	
135	3498		137,72	
136	3523		138,70	
137 *	3549		139,72	
138	3574		140,71	
140	3625		142,72	
141 *	3650		143,70	
143	3701		145,71	
144	3727		146,73	
145 *	3752		147,72	
146 *	3777		148,70	
150	3879		152,72	
155	4006		157,72	
156 *	4031		158,70	
157 *	4057		159,72	
158	4082		160,71	
159 *	4108		161,73	
161 *	4146		163,23	
162 *	4183		164,68	
163 *	4209		165,71	
173	4465		175,79	
174	4489		176,73	
175 *	4514		177,72	
176 *	4539		178,70	
177	4565		179,72	
179 *	4616		181,73	
180	4647		182,95	
181 *	4661		183,50	
184 *	4743		186,73	
187 *	4819		189,72	
188 *	4844		190,71	
190 *	4895		192,72	
194 *	4997		196,73	
195	5022		197,72	
196 *	5047		198,70	
197 *	5073		199,72	
201 *	5174		203,70	
210 *	5403		212,72	
211 *	5428		213,70	
214 *	5505		216,73	
218 *	5610		220,87	
225 *	5784		227,72	

Section HBB / BB

RMA	L _e (mm)	L _r (mm)	L _e (inch)	L _r (inch)
74	1947		76,65	
75	1974		77,72	
76	1999		78,70	
78 *	2050		80,71	

PROGRAM
21



ROFLEX Double-Sided V-Belts

Section HBB / BB

RMA	L _e (mm)	L _r (mm)	L _e (inch)	L _r (inch)
234 *	6013		236,73	
240 *	6155		242,32	
249 *	6392		251,65	
253 *	6495		255,71	
262 *	6724		264,72	
269 *	6902		271,73	
270 *	6930		272,83	
273 *	7003		275,71	

Section 25 x 22


RMA	L _e (mm)	L _r (mm)	L _e (inch)	L _r (inch)
2810 *		2871		113,03
3180 *		3241		127,60
3210 *		3271		128,78
3280 *		3341		131,54
4060 *		4121		162,24

Section HCC / CC

RMA	L _e (mm)	L _r (mm)	L _e (inch)	L _r (inch)
111 *	2921		115,00	
112 *	2946		115,98	
114 *	2997		117,99	
122 *	3200		125,98	
124 *	3250		127,95	
126 *	3301		129,96	
128 *	3352		131,97	
130 *	3400		133,86	
134 *	3505		137,99	
135	3530		138,98	
138	3606		141,97	
142	3708		145,98	
144	3759		147,99	
146	3809		149,96	
147	3834		150,94	
148	3860		151,97	
149	3886		152,99	
153 *	3987		156,97	
154 *	4013		157,99	
155 *	4037		158,94	
156 *	4063		159,96	
158	4114		161,97	
159 *	4140		162,99	
162	4216		165,98	
164 *	4267		167,99	
165 *	4292		168,98	
173	4495		176,97	
175	4546		178,98	
178	4622		181,97	
180	4673		183,98	
182 *	4724		185,98	
188 *	4876		191,97	
193 *	5003		196,97	
195	5054		198,98	
197 *	5105		200,98	
198	5130		201,97	
205 *	5308		208,98	
206 *	5333		209,96	
207 *	5359		210,98	
210	5435		213,98	
212	5485		215,94	
213 *	5511		216,97	
220	5691		224,05	
222 *	5740		225,98	
224 *	5791		227,99	
226	5841		229,96	
227	5867		230,98	
228	5892		231,97	
232 *	5994		235,98	
238 *	6146		241,97	
240 *	6197		243,98	
253	6533		257,20	
270	6960		274,02	



ROFLEX Banded V-Belts



SECTION	ASAE S 211.4ANSI/RMA IP-20,RMA/MPTA IP-22	A/HA	B/HB	C/HC	D/HD	3V/ 9J	5V/ 15J	8V/ 15J	SPZ	SPA	SPB	SPC
Belt width	b_o [mm] \approx	13	17	22	32	9	15	25	9	12	16	22
Belt thickness	H [mm] \approx	11	14,3	18	24,5	11	16,5	27	11	13	11	22
Belt pitch	e [mm]	12	15	19	25,5	10,3	17,5	28,6	12	15	19	25,5
Inner length	$L_i \approx L_e$ - [mm]	36	62	75	111	42	71	120	51	63	82	113
Minimum effective diameter of smallest pulley	d_d [mm]	80	130	210	370	67	180	315	63	90	140	224
Weight	[kg/m/rib] \approx	0,162	0,260	0,431	0,957	0,113	0,262	0,685	0,119	0,195	0,268	0,495
Maximum bending frequency	f [Hz]	70										
Recommended maximum belt speed	v [m/s]	30										

* On request

Section A/HA

RMA	L_a (mm)	L_i (mm)	L_a (inch)	L_i (inch)
51 *	1336	1300	52,60	51,18
57 *	1486	1450	58,50	57,09
59 *	1536	1500	60,47	59,06
64 *	1661	1625	65,39	63,98
67 *	1736	1700	68,35	66,93
71 *	1836	1800	72,28	70,87
75 *	1936	1900	76,22	74,80
79 *	2036	2000	80,16	78,74
88 *	2276	2240	89,61	88,19
98 *	2536	2500	99,84	98,43
104 *	2686	2650	105,75	104,33
112 *	2881	2845	113,42	112,01
120 *	3084	3048	121,42	120,00
128 *	3286	3250	129,37	127,95
144 *	3694	3658	145,43	144,02
158 *	4036	4000	158,90	157,48

Section B/HB

RMA	L_a (mm)	L_i (mm)	L_a (inch)	L_i (inch)
146 *	3762	3700	148,11	145,67
148 *	3812	3750	150,08	147,64
158 *	4062	4000	159,92	157,48
167 *	4312	4250	169,76	167,32
177 *	4562	4500	179,61	177,17
187 *	4812	4750	189,45	187,01
195 *	5015	4953	197,44	195,00
197 *	5062	5000	199,29	196,85
208 *	5362	5300	211,10	208,66
220 *	5662	5600	222,91	220,47

Section D/HD

RMA	L_a (mm)	L_i (mm)	L_a (inch)	L_i (inch)
255 *	6588	6477	259,37	255,00
270 *	6969	6858	274,37	270,00
285 *	7350	7239	289,37	285,00
300 *	7731	7620	304,37	300,00
315 *	8111	8000	319,33	314,96
330 *	8493	8382	334,37	330,00
345 *	8874	8763	349,37	345,00
360 *	9255	9144	364,37	360,00
390 *	10017	9906	394,37	390,00
420 *	10779	10668	424,37	420,00
450 *	11541	11430	454,37	450,00
480 *	12311	12200	484,68	480,31
520 *	13317	13206	524,29	519,92
530 *	13573	13462	534,37	530,00
540 *	13827	13716	544,37	540,00
560 *	14335	14224	564,37	560,00

Section C/HC

RMA	L_a (mm)	L_i (mm)	L_a (inch)	L_i (inch)
90 *	2361	2286	92,95	90,00
98 *	2575	2500	101,38	98,43
108 *	2825	2750	111,22	108,27
120 *	3123	3048	122,95	120,00
128 *	3325	3250	130,91	127,95
140 *	3625	3550	142,72	139,76
146 *	3775	3700	148,62	145,67
151 *	3925	3850	154,53	151,57
167 *	4325	4250	170,28	167,32
177 *	4575	4500	180,12	177,17
187 *	4825	4750	189,96	187,01
197 *	5075	5000	199,80	196,85
208 *	5375	5300	211,61	208,66
220 *	5675	5600	223,42	220,47
236 *	6075	6000	239,17	236,22
248 *	6375	6300	250,98	248,03

Section B/HB

RMA	L_a (mm)	L_i (mm)	L_a (inch)	L_i (inch)
47 *	1262	1200	49,68	47,24
51 *	1362	1300	53,62	51,18
55 *	1462	1400	57,56	55,12
59 *	1562	1500	61,50	59,06
63 *	1662	1600	65,43	62,99
64 *	1687	1625	66,42	63,98
67 *	1762	1700	69,37	66,93
71 *	1862	1800	73,31	70,87
73 *	1912	1850	75,28	72,83
75 *	1962	1900	77,24	74,80
79 *	2062	2000	81,18	78,74
83 *	2162	2100	85,12	82,68
88 *	2302	2240	90,63	88,19
91 *	2362	2300	92,99	90,55
95 *	2462	2400	96,93	94,49
97 *	2527	2465	99,49	97,05
98 *	2562	2500	100,87	98,43
102 *	2662	2600	104,80	102,36
103	2678	2616	105,43	102,99
106 *	2762	2700	108,74	106,30
112	2907	2845	114,45	112,01
120	3110	3048	122,44	120,00
124	3212	3150	126,46	124,02
128	3312	3250	130,39	127,95
132 *	3412	3350	134,33	131,89
136	3512	3450	138,27	135,83
140	3612	3550	142,20	139,76
144	3720	3658	146,46	144,02

Section D/HD

RMA	L_a (mm)	L_i (mm)	L_a (inch)	L_i (inch)
90 *	2397	2286	94,37	90,00
98 *	2611	2500	102,80	98,43
110 *	2911	2800	114,61	110,24
120 *	3159	3048	124,37	120,00
128 *	3361	3250	132,32	127,95
144 *	3769	3658	148,39	144,02
158 *	4111	4000	161,85	157,48
162 *	4226	4115	166,38	162,01
173 *	4505	4394	177,36	172,99
180 *	4683	4572	184,37	180,00
195 *	5064	4953	199,37	195,00
210 *	5445	5334	214,37	210,00
225 *	5826	5715	229,37	225,00
240 *	6207	6096	244,37	240,00

Section 3V (9J)

RMA notation L_e (1/10 inch)	ISO notation L_e (mm)
* 3V 450	9J1143
* 3V 475	9J1207
* 3V 500	9J1270
3V 530	9J1346
3V 560	9J1422
3V 600	9J1524
3V 630	9J1600
3V 670	9J1702
3V 710	9J1803
3V 750	9J1905
3V 800	9J2032
3V 850	9J2159
* 3V 900	9J2286
* 3V 950	9J2413
* 3V 1000	9J2540
* 3V 1060	9J2692
* 3V 1120	9J2845
* 3V 1180	9J2997
* 3V 1250	9J3175
* 3V 1320	9J3353
* 3V 1400	9J3556
* 3V 1500	9J3810
* 3V 1600	9J4064
* 3V 1700	9J4318
* 3V 1800	9J4572

PROGRAM
23

ROFLEX Banded V-Belts

Section 5V (15J)

RMA notation L _e (1/10 inch)	ISO notation L _e (mm)
5V 900	15J2286
5V 950	15J2413
5V 1000	15J2540
5V 1060	15J2692
5V 1120	15J2845
5V 1180	15J2997
5V 1250	15J3175
5V 1320	15J3353
5V 1400	15J3556
5V 1500	15J3810
5V 1600	15J4064
5V 1700	15J4318
5V 1800	15J4572
5V 1900	15J4826
5V 2000	15J5080
5V 2120	15J5385
5V 2240	15J5690
5V 2360	15J5994
5V 2500	15J6350
5V 2650	15J6731
5V 2800	15J7112
5V 3000	15J7620
5V 3150	15J8001
5V 3350	15J8509
5V 3550	15J9017

Section SPZ

L _w (mm)	L _w (inch)
* 900	35,43
* 912	35,91
* 925	36,42
* 937	36,89
* 950	37,40
* 987	38,86
* 1047	41,22
* 1112	43,78
* 1120	44,09
* 1137	44,76
* 1162	45,75
* 1180	46,46
* 1187	46,73
* 1202	47,32
* 1212	47,72
* 1237	48,70
* 1250	49,21
* 1262	49,68
* 1287	50,67
* 1312	51,65
* 1320	51,97
* 1337	52,64
* 1347	53,03
* 1362	53,62
* 1387	54,61
* 1400	55,12
* 1412	55,59
* 1437	56,57
* 1462	57,56
* 1487	58,54
* 1500	59,06
* 1512	59,53
* 1537	60,51
* 1562	61,50
* 1587	62,48
* 1600	62,99
* 1612	63,46
* 1637	64,45
* 1662	65,43
* 1687	66,42
* 1700	66,93
* 1737	68,39
* 1762	69,37
* 1787	70,35
* 1800	70,87
* 1812	71,34
* 1837	72,32
* 1862	73,31
* 1887	74,29
* 1900	74,80
* 1937	76,26
* 1987	78,23
* 2000	78,74
* 2037	80,20
* 2120	83,46
* 2137	84,13
* 2187	86,10
* 2240	88,19
* 2262	89,05
* 2287	90,04
* 2300	90,55
* 2360	92,91
* 2450	96,46
* 2500	98,43
* 2650	104,33
* 2800	110,24
* 3000	118,11
* 3150	124,02

Section SPZ

L _w (mm)	L _w (inch)
* 3350	131,89
* 3550	139,76

Section SPA

L _w (mm)	L _w (inch)
* 900	35,43
* 1000	39,37
* 1107	43,58
* 1132	44,57
* 1157	45,55
* 1180	46,46
* 1200	47,24
* 1232	48,50
* 1250	49,21
* 1272	50,08
* 1282	50,47
* 1300	51,18
* 1332	52,44
* 1357	53,43
* 1382	54,41
* 1400	55,12
* 1432	56,38
* 1457	57,36
* 1482	58,35
* 1500	59,06
* 1532	60,31
* 1557	61,30
* 1582	62,28
* 1600	62,99
* 1632	64,25
* 1657	65,24
* 1682	66,22
* 1700	66,93
* 1707	67,20
* 1732	68,19
* 1757	69,17
* 1782	70,16
* 1800	70,87
* 1832	72,13
* 1857	73,11
* 1882	74,09
* 1900	74,80
* 1932	76,06
* 1957	77,05
* 1982	78,03
* 2000	78,74
* 2032	80,00
* 2057	80,98
* 2082	81,97
* 2120	83,46
* 2132	83,94
* 2182	85,91
* 2207	86,89
* 2240	88,19
* 2282	89,84
* 2300	90,55
* 2332	91,81
* 2360	92,91
* 2382	93,78
* 2432	95,75
* 2482	97,72
* 2500	98,43
* 2532	99,68
* 2582	101,65
* 2607	102,64
* 2632	103,62
* 2650	104,33

Section 8V (25J)

RMA notation L _e (1/10 inch)	ISO notation L _e (mm)
* 8V 1000	25J2540
* 8V 1060	25J2692
* 8V 1120	25J2845
* 8V 1180	25J2997
* 8V 1250	25J3175
* 8V 1320	25J3353
* 8V 1400	25J3556
* 8V 1500	25J3810
* 8V 1600	25J4064
* 8V 1700	25J4318
* 8V 1800	25J4572
* 8V 1900	25J4826
* 8V 2000	25J5080
* 8V 2120	25J5383
* 8V 2240	25J5690
* 8V 2360	25J5994
* 8V 2500	25J6350
* 8V 2650	25J6731
* 8V 2800	25J7112
* 8V 3000	25J7620
* 8V 3150	25J8001
* 8V 3350	25J8509
* 8V 3550	25J9017
* 8V 3750	25J9525
* 8V 4000	25J10160
* 8V 4250	25J10795
* 8V 4500	25J11430
* 8V 4750	25J12065
* 8V 5000	25J12700
* 8V 5600	25J14224
* 8V 6000	25J15240
* 8V 6300	25J16002

PROGRAM
23



ROFLEX Banded V-Belts

Section SPA

L _w (mm)	L _w (inch)
* 2682	105,59
* 2732	107,56
* 2782	109,53
* 2800	110,24
* 2832	111,50
* 2847	112,09
* 2882	113,46
* 2932	115,43
* 3000	118,11
* 3032	119,37
* 3082	121,34
* 3150	124,02
* 3182	125,28
* 3282	129,21
* 3350	131,89
* 3382	133,15
* 3550	139,76
* 3750	147,64
* 4000	157,48
* 4250	167,32
* 4500	177,17

Section SPC

L _w (mm)	L _w (inch)
5300	208,66
5600	220,47
6000	236,22
6300	248,03
6700	263,78
7100	279,53
* 7500	295,28
8000	314,96
* 8500	334,65
* 9000	354,33
9500	374,02
* 10000	393,70
* 10600	417,32
* 11200	440,94
* 11800	464,57
* 12500	492,13

Section SPB


L _w (mm)	L _w (inch)
2000	78,74
2100	82,68
2240	88,19
2360	92,91
2500	98,43
2650	104,33
2800	110,24
3000	118,11
3150	124,02
3350	131,89
3550	139,76
3750	147,64
4000	157,48
4250	167,32
4500	177,17
4750	187,01
5000	196,85
5300	208,66
5600	220,47
6000	236,22
* 6300	248,03
* 6700	263,78
* 7100	279,53
* 7500	295,28
* 8000	314,96
* 9500	374,02
* 10000	393,70

Section SPC

L _w (mm)	L _w (inch)
* 2650	104,33
* 2800	110,24
* 3000	118,11
* 3150	124,02
3350	131,89
3550	139,76
3750	147,64
4000	157,48
4250	167,32
4500	177,17
4750	187,01
5000	196,85



ROFLEX Multiribbed Belts



SECTION	ASAE S 211.4/ANSI/RMA IP-20, RMA/MPTA IP-22	PJ	PK	PL	PM
Rib pitch	S [mm]	2,34	3,56	4,7	9,4
Belt thickness	h [mm] ≈	3,8	5,0	9,0	14,5
Minimum effective diameter of smallest pulley	d _d [mm]	20	45	75	180
Recommended maximum belt speed	v [m/s]	60	50	40	35

* On request



Section PJ		Section PJ		Section PK		Section PL	
L _b (mm)	L _b (1/10 inch)	L _b (mm)	L _b (1/10 inch)	L _b (mm)	L _b (1/10 inch)	L _b (mm)	L _b (1/10 inch)
* 330	130	1219	480	960	378	1295	510
356	140	1245	490	1010	397	1321	520
381	150	* 1251	492	1035	407	1333	525
406	160	1270	500	1132	445	1346	530
432	170	* 1280	504	* 1173	462	1372	540
457	180	* 1287	507	1207	475	1397	550
483	190	1295	510	1246	490	1422	560
508	200	1321	520	1298	511	1435	565
559	220	* 1325	522	1357	534	* 1466	577
584	230	1333	525	1420	559	1473	580
610	240	* 1340	528	1459	574	1499	590
660	260	1372	540	1481	583	* 1520	598
* 675	266	1397	550	1521	598	1562	615
686	270	* 1428	562	1607	632	1613	635
* 704	277	1461	575	1630	641	1651	650
711	280	* 1466	577	1675	659	1664	655
* 723	285	1473	580	1725	679	1715	675
737	290	* 1520	598	1815	714	1765	695
762	300	1549	610	* 1860	732	1803	710
* 782	308	1600	630	1885	741	1841	725
787	310	1626	640	1982	780	1943	765
* 792	311	1651	650	2031	799	1956	770
* 797	314	1702	670	2080	818	1981	780
813	320	1753	690	2171	854	2019	795
838	330	1778	700	2225	875	2070	815
864	340	1854	730	2471	972	2095	825
889	350	* 1885	742	2551	1003	2134	840
* 895	352	1915	754			2195	865
914	360	1930	760			2235	880
* 955	376	1956	770			2324	915
* 958	377	1981	780			2362	930
965	380	* 1992	784			2477	975
* 985	388	2019	795			2515	990
991	390	* 2070	815			2705	1065
* 1000	394	2083	820			* 723	285
1016	400	* 2134	840			* 762	300
* 1040	409	2210	870			* 794	313
1054	415	2286	900			* 840	331
* 1059	416	2337	920			* 880	346
* 1065	419	2489	980			* 954	376
1092	430					991	390
* 1105	435					1041	410
* 1117	440					* 1075	423
* 1130	445					* 1080	425
* 1136	447					* 1092	430
1143	450					* 1098	432
* 1151	453					1149	452
1168	460					* 1163	458
* 1173	462					1168	460
1194	470					1194	470
1200	472					1219	480
1208	476					* 1237	487
						1270	500



ROFLEX Multiribbed Belts

Section PL

L _b (mm)	L _b (1/10 inch)
6096	2400
7055	2777

Section PM

L _b (mm)	L _b (1/10 inch)
2286	900
2388	940
2515	990
2693	1060
2832	1115
2921	1150
3010	1185
3124	1230
3327	1310
3531	1390
3734	1470
4089	1610
4191	1650
4470	1760
4648	1830
5029	1980
5410	2130
6121	2410
6883	2710
7646	3010
8408	3310
9169	3610
9931	3910
10693	4210
12217	4810
13741	5410
15266	6010
16764	6600



RO-DRIVE Synchronous Belts

Section XL

Section	L _w (mm)	L _w (inch)	z
* 514 XL	1305,56	51,40	257
* 580 XL	1473,20	58,00	290
* 630 XL	1600,20	63,00	315

Section L

Section	L _w (mm)	L _w (inch)	z
124 L	314,33	12,38	33
* 135 L	342,9	13,50	36
150 L	381,00	15,00	40
* 172 L	438,20	17,25	46
187 L	476,25	18,75	50
* 202 L	514,40	20,25	54
210 L	533,40	21,00	56
225 L	571,50	22,50	60
* 236 L	600,08	23,63	63
240 L	609,60	24,00	64
* 244 L	619,13	24,38	65
255 L	647,70	25,50	68
270 L	685,80	27,00	72
285 L	723,90	28,50	76
300 L	762,00	30,00	80
322 L	819,15	32,25	86
345 L	876,30	34,50	92
367 L	933,45	36,75	98
390 L	990,60	39,00	104
* 405 L	1028,70	40,50	108
420 L	1066,80	42,00	112
* 442 L	1123,95	44,25	118
450 L	1143,00	45,00	120
* 454 L	1152,53	45,38	121
480 L	1219,20	48,00	128
510 L	1295,40	51,00	136
540 L	1371,60	54,00	144
600 L	1524,00	60,00	160
* 660 L	1676,40	66,00	176
* 728 L	1849,10	72,80	194
* 817 L	2076,50	81,75	218

Section H

Section	L _w (mm)	L _w (inch)	z
240 H	609,60	24,00	48
255 H	647,70	25,50	51
270 H	685,80	27,00	54
300 H	762,00	30,00	60
330 H	838,20	33,00	66
* 335 H	850,90	33,50	67
360 H	914,40	36,00	72
* 370 H	939,80	37,00	74
390 H	990,60	39,00	78
* 400 H	1016,00	40,00	84
420 H	1066,80	42,00	84
450 H	1143,00	45,00	90
480 H	1219,20	48,00	96
510 H	1295,40	51,00	102
540 H	1371,60	54,00	108
570 H	1447,80	57,00	114
600 H	1524,00	60,00	120
630 H	1600,20	63,00	126
660 H	1676,40	66,00	132
700 H	1778,00	70,00	140
* 725 H	1841,50	72,50	145
* 730 H	1854,20	73,00	146
750 H	1905,00	75,00	150
800 H	2032,00	80,00	160
850 H	2159,00	85,00	170
900 H	2286,00	90,00	180

Section H

Section	L _w (mm)	L _w (inch)	z
* 950 H	2413,00	95,00	190
1000 H	2540,00	100,00	200
1100 H	2794,00	110,00	220
* 1140 H	2895,60	114,00	228
* 1150 H	2921,00	115,00	230
1250 H	3175,00	125,00	250
1400 H	3556,00	140,00	280
1700 H	4318,00	170,00	340

Section XH

Section	L _w (mm)	L _w (inch)	z
507 XH	1289,05	50,75	58
* 534 XH	1356,36	53,40	61
560 XH	1422,40	56,00	64
630 XH	1600,20	63,00	72
700 XH	1778,00	70,00	80
770 XH	1955,80	77,00	88
840 XH	2133,60	84,00	96
980 XH	2489,20	98,00	112
1120 XH	2844,80	112,00	128
1260 XH	3200,40	126,00	144
1400 XH	3556,00	140,00	160
1540 XH	3911,60	154,00	176
1750 XH	4445,00	175,00	200

Section XXH

Section	L _w (mm)	L _w (inch)	z
* 700 XXH	1778,00	70,00	56
* 800 XXH	2032,00	80,00	64
* 900 XXH	2286,00	90,00	72
* 1000 XXH	2540,00	100,00	80
* 1200 XXH	3048,00	120,00	96
* 1400 XXH	3556,00	140,00	112
* 1600 XXH	4064,00	160,00	128
* 1800 XXH	4572,00	180,00	144

Section 3M HTD

Section	L _w (mm)	L _w (inch)	z
111 - 3M	111,00	4,37	37
* 117 - 3M	117,00	4,61	39
129 - 3M	129,00	5,08	43
* 141 - 3M	141,00	5,55	47
144 - 3M	144,00	5,67	48
150 - 3M	150,00	5,91	50
* 156 - 3M	156,00	6,14	52
159 - 3M	159,00	6,26	53
168 - 3M	168,00	6,61	56
174 - 3M	174,00	6,85	58
177 - 3M	177,00	6,97	59
* 180 - 3M	180,00	7,09	60
* 186 - 3M	186,00	7,32	62
* 192 - 3M	192,00	7,56	64
* 195 - 3M	195,00	7,68	65
201 - 3M	201,00	7,91	67
* 204 - 3M	204,00	8,03	68
210 - 3M	210,00	8,27	70
213 - 3M	213,00	8,39	71
216 - 3M	216,00	8,50	72
225 - 3M	225,00	8,86	75
240 - 3M	240,00	9,45	80
* 243 - 3M	243,00	9,57	81
* 246 - 3M	246,00	9,69	82
252 - 3M	252,00	9,92	84
255 - 3M	255,00	10,04	85
267 - 3M	267,00	10,51	89
* 276 - 3M	276,00	10,87	92

Section 3M HTD

Section	L _w (mm)	L _w (inch)	z
* 285 - 3M	285,00	11,22	95
* 294 - 3M	294,00	11,57	98
300 - 3M	300,00	11,81	100
312 - 3M	312,00	12,28	104
318 - 3M	318,00	12,52	106
* 330 - 3M	330,00	12,99	110
336 - 3M	336,00	13,23	112
339 - 3M	339,00	13,35	113
* 345 - 3M	345,00	13,58	115
* 357 - 3M	357,00	14,06	119
363 - 3M	363,00	14,29	121
384 - 3M	384,00	15,12	128
390 - 3M	390,00	15,35	130
393 - 3M	393,00	15,47	131
420 - 3M	420,00	16,54	140
447 - 3M	447,00	17,60	149
474 - 3M	474,00	18,66	158
480 - 3M	480,00	18,90	160
* 486 - 3M	486,00	19,13	162
* 489 - 3M	489,00	19,25	163
* 495 - 3M	495,00	19,49	165
501 - 3M	501,00	19,72	167
513 - 3M	513,00	20,20	171
522 - 3M	522,00	20,55	174
525 - 3M	525,00	20,67	175
537 - 3M	537,00	21,14	179
564 - 3M	564,00	22,20	188
570 - 3M	570,00	22,44	190
* 597 - 3M	597,00	23,50	199
* 600 - 3M	600,00	23,62	200
606 - 3M	606,00	23,86	202
* 612 - 3M	612,00	24,09	204
633 - 3M	633,00	24,92	211
669 - 3M	669,00	26,34	223
708 - 3M	708,00	27,87	236
711 - 3M	711,00	27,99	237
* 738 - 3M	738,00	29,06	246
* 753 - 3M	753,00	29,65	251
* 804 - 3M	804,00	31,65	269
822 - 3M	822,00	32,36	274
* 843 - 3M	843,00	33,19	281
882 - 3M	882,00	34,72	294
945 - 3M	945,00	37,20	315
* 960 - 3M	960,00	37,80	320
1041 - 3M	1041,00	40,98	347
1068 - 3M	1068,00	42,05	356
1071 - 3M	1071,00	42,17	357
1125 - 3M	1125,00	44,29	375
* 1176 - 3M	1176,00	46,30	392
1245 - 3M	1245,00	49,02	415
* 1263 - 3M	1263,00	49,72	421
* 1500 - 3M	1500,00	59,06	500
1569 - 3M	1569,00	61,77	523

Section 5M HTD

Section	L _w (mm)	L _w (inch)	z
* 180 - 5M	180,00	7,09	36
* 225 - 5M	225,00	8,86	45
* 235 - 5M	235,00	9,25	47
* 245 - 5M	245,00	9,65	49
* 255 - 5M	255,00	10,04	51
* 265 - 5M	265,00	10,43	53
* 270 - 5M	270,00	10,63	54
275 - 5M	275,00	10,83	55
* 280 - 5M	280,00	11,02	56
* 285 - 5M	285,00	11,22	57
* 295 - 5M	295,00	11,61	59

RO-DRIVE Synchronous Belts

Section 5M HTD

Section	L _w (mm)	L _w (inch)	z
300 - 5M	300,00	11,81	60
* 305 - 5M	305,00	12,01	61
* 325 - 5M	325,00	12,80	65
330 - 5M	330,00	12,99	66
* 340 - 5M	340,00	13,39	68
* 345 - 5M	345,00	13,58	69
350 - 5M	350,00	13,78	70
* 360 - 5M	360,00	14,17	72
375 - 5M	375,00	14,76	75
400 - 5M	400,00	15,75	80
* 420 - 5M	420,00	16,54	84
425 - 5M	425,00	16,73	85
450 - 5M	450,00	17,72	90
* 455 - 5M	455,00	17,91	91
460 - 5M	460,00	18,11	92
* 465 - 5M	465,00	18,31	93
475 - 5M	475,00	18,70	95
500 - 5M	500,00	19,69	100
* 525 - 5M	525,00	20,67	105
535 - 5M	535,00	21,06	107
550 - 5M	550,00	21,65	110
* 560 - 5M	560,00	22,05	112
565 - 5M	565,00	22,24	113
* 575 - 5M	575,00	22,64	115
* 580 - 5M	580,00	22,83	116
600 - 5M	600,00	23,62	120
* 610 - 5M	610,00	24,02	122
615 - 5M	615,00	24,21	123
620 - 5M	620,00	24,41	124
630 - 5M	630,00	24,80	126
635 - 5M	635,00	25,00	127
* 640 - 5M	640,00	25,20	128
665 - 5M	665,00	26,18	133
* 670 - 5M	670,00	26,38	134
* 675 - 5M	675,00	26,57	135
700 - 5M	700,00	27,56	140
* 705 - 5M	705,00	27,76	141
710 - 5M	710,00	27,95	142
* 725 - 5M	725,00	28,54	145
740 - 5M	740,00	29,13	148
* 750 - 5M	750,00	29,53	150
755 - 5M	755,00	29,72	151
800 - 5M	800,00	31,50	160
835 - 5M	835,00	32,87	167
840 - 5M	840,00	33,07	168
* 850 - 5M	850,00	33,46	170
860 - 5M	860,00	33,86	172
890 - 5M	890,00	35,04	178
900 - 5M	900,00	35,43	180
925 - 5M	925,00	36,42	185
* 935 - 5M	935,00	36,81	187
* 940 - 5M	940,00	37,01	188
950 - 5M	950,00	37,40	190
* 980 - 5M	980,00	38,58	196
1000 - 5M	1000,00	39,37	200
* 1025 - 5M	1025,00	40,35	205
1050 - 5M	1050,00	41,34	210
* 1100 - 5M	1100,00	43,31	220
1125 - 5M	1125,00	44,29	225
* 1175 - 5M	1175,00	46,26	235
1200 - 5M	1200,00	47,24	240
* 1240 - 5M	1240,00	48,82	248
1270 - 5M	1270,00	50,00	254
1420 - 5M	1420,00	55,91	284
1500 - 5M	1500,00	59,06	300
1595 - 5M	1595,00	62,80	319
1690 - 5M	1690,00	66,54	338
* 1790 - 5M	1790,00	70,47	358

Section 5M HTD

Section	L _w (mm)	L _w (inch)	z
* 1800 - 5M	1800,00	70,87	360
* 1870 - 5M	1870,00	73,62	374
* 1895 - 5M	1895,00	74,61	379
* 2000 - 5M	2000,00	78,74	400
* 2525 - 5M	2525,00	99,41	500

Section 8M HTD

Section	L _w (mm)	L _w (inch)	z
* 3048 - 8M	3048,00	120,00	381
* 3280 - 8M	3280,00	129,13	410
* 3408 - 8M	3408,00	134,17	426
* 3600 - 8M	3600,00	141,73	450
* 3808 - 8M	3808,00	149,92	476
* 4400 - 8M	4400,00	173,23	530

Section 8M HTD

Section	L _w (mm)	L _w (inch)	z
288 - 8M	288,00	11,34	36
304 - 8M	304,00	11,97	38
* 320 - 8M	320,00	12,60	40
352 - 8M	352,00	13,86	44
* 360 - 8M	360,00	14,17	45
376 - 8M	376,00	14,80	47
* 384 - 8M	384,00	15,12	48
* 408 - 8M	408,00	16,06	51
416 - 8M	416,00	16,38	52
424 - 8M	424,00	16,69	53
* 456 - 8M	456,00	17,95	57
* 472 - 8M	472,00	18,58	59
480 - 8M	480,00	18,90	60
* 536 - 8M	536,00	21,10	67
* 544 - 8M	544,00	21,42	68
560 - 8M	560,00	22,05	70
600 - 8M	600,00	23,62	75
* 608 - 8M	608,00	23,94	76
* 624 - 8M	624,00	24,57	78
* 632 - 8M	632,00	24,88	79
640 - 8M	640,00	25,20	80
656 - 8M	656,00	25,83	82
* 680 - 8M	680,00	26,77	85
720 - 8M	720,00	28,35	90
* 776 - 8M	776,00	30,55	97
784 - 8M	784,00	30,87	98
800 - 8M	800,00	31,50	100
* 840 - 8M	840,00	33,07	105
880 - 8M	880,00	34,65	110
* 896 - 8M	896,00	35,28	112
* 912 - 8M	912,00	35,91	114
920 - 8M	920,00	36,22	115
960 - 8M	960,00	37,80	120
* 1000 - 8M	1000,00	39,37	125
1040 - 8M	1040,00	40,94	130
* 1080 - 8M	1080,00	42,52	135
1120 - 8M	1120,00	44,09	140
1200 - 8M	1200,00	47,24	150
* 1224 - 8M	1224,00	48,19	153
1280 - 8M	1280,00	50,39	160
1304 - 8M	1304,00	51,34	163
* 1328 - 8M	1328,00	52,28	166
* 1352 - 8M	1352,00	53,23	169
1360 - 8M	1360,00	53,54	170
1424 - 8M	1424,00	56,06	178
1440 - 8M	1440,00	56,69	180
* 1464 - 8M	1464,00	57,64	183
* 1520 - 8M	1520,00	59,84	190
1600 - 8M	1600,00	62,99	200
1760 - 8M	1760,00	69,29	220
1800 - 8M	1800,00	70,87	225
2000 - 8M	2000,00	78,74	250
* 2200 - 8M	2200,00	86,61	275
2248 - 8M	2248,00	88,50	281
2400 - 8M	2400,00	94,49	300
* 2520 - 8M	2520,00	99,21	325
* 2600 - 8M	2600,00	102,36	325
2800 - 8M	2800,00	110,24	350
* 3008 - 8M	3008,00	118,42	376

Section 14M HTD

Section	L _w (mm)	L _w (inch)	z
966 - 14M	966,00	38,03	69
* 994 - 14M	994,00	39,13	71
* 1092 - 14M	1092,00	42,99	78
1190 - 14M	1190,00	46,85	85
* 1344 - 14M	1344,00	52,91	96
1400 - 14M	1400,00	55,12	100
1610 - 14M	1610,00	63,39	115
* 1764 - 14M	1764,00	69,45	126
1778 - 14M	1778,00	70,00	127
1890 - 14M	1890,00	74,41	135
2100 - 14M	2100,00	82,68	150
2310 - 14M	2310,00	90,94	165
2450 - 14M	2450,00	96,46	175
2590 - 14M	2590,00	101,97	185
2800 - 14M	2800,00	110,24	200
3150 - 14M	3150,00	124,02	225
* 3360 - 14M	3360,00	132,28	240
3500 - 14M	3500,00	137,80	250
3850 - 14M	3850,00	151,57	275
4326 - 14M	4326,00	170,31	309
4578 - 14M	4578,00	180,24	327
* 4956 - 14M	4956,00	195,12	354

Section S8M STD

Section	L _w (mm)	L _w (inch)	z
440 - S8M	440	17,32	55
* 464 - S8M	464	18,27	58
480 - S8M	480	18,90	60
528 - S8M	528	20,79	66
560 - S8M	560	22,05	70
600 - S8M	600	23,62	75
632 - S8M	632	24,88	79
640 - S8M	640	25,20	80
656 - S8M	656	25,83	82
672 - S8M	672	26,46	84
688 - S8M	688	27,09	86
696 - S8M	696	27,40	87
712 - S8M	712	28,03	89
720 - S8M	720	28,35	90
728 - S8M	728	28,66	91
736 - S8M	736	28,98	92
760 - S8M	760	29,92	95
768 - S8M	768	30,24	96
784 - S8M	784	30,87	98
792 - S8M	792	31,18	99
800 - S8M	800	31,50	100
824 - S8M	824	32,44	103
* 840 - S8M	840	33,07	105
848 - S8M	848	33,39	106
864 - S8M	864	34,02	108
880 - S8M	880	34,65	110
* 896 - S8M	896	35,28	112
912 - S8M	912	35,91	114
920 - S8M	920	36,22	115
944 - S8M	944	37,17	118
960 - S8M	960	37,80	120
* 976 - S8M	976	38,43	122

PROGRAM
34



RO-DRIVE Synchronous Belts

Section S8M STD


Section	L _w (mm)	L _w (inch)	z
992 - S8M	992	39,06	124
1000 - S8M	1000	39,37	125
* 1016 - S8M	1016	40,00	127
* 1024 - S8M	1024	40,31	128
* 1032 - S8M	1032	40,63	129
1056 - S8M	1056	41,57	132
1064 - S8M	1064	41,89	133
1072 - S8M	1072	42,20	134
* 1080 - S8M	1080	42,52	135
* 1096 - S8M	1096	43,15	137
* 1104 - S8M	1104	43,46	138
1120 - S8M	1120	44,09	140
1136 - S8M	1136	44,72	142
* 1152 - S8M	1152	45,35	144
1160 - S8M	1160	45,67	145
1168 - S8M	1168	45,98	146
1176 - S8M	1176	46,30	147
1184 - S8M	1184	46,61	148
* 1192 - S8M	1192	46,93	149
1200 - S8M	1200	47,24	150
* 1208 - S8M	1208	47,56	151
1216 - S8M	1216	47,87	152
* 1224 - S8M	1224	48,19	153
1240 - S8M	1240	48,82	155
1256 - S8M	1256	49,45	157
1264 - S8M	1264	49,76	158
1280 - S8M	1280	50,39	160
1296 - S8M	1296	51,02	162
1304 - S8M	1304	51,34	163
1312 - S8M	1312	51,65	164
1344 - S8M	1344	52,91	168
* 1352 - S8M	1352	53,23	169
1368 - S8M	1368	53,86	171
1400 - S8M	1400	55,12	175
1408 - S8M	1408	55,43	176
* 1432 - S8M	1432	56,38	179
1440 - S8M	1440	56,69	180
1480 - S8M	1480	58,27	185
1512 - S8M	1512	59,53	189
* 1520 - S8M	1520	59,84	190
* 1536 - S8M	1536	60,47	192
* 1544 - S8M	1544	60,79	193
1552 - S8M	1552	61,10	194
1600 - S8M	1600	62,99	200
1624 - S8M	1624	63,94	203
1760 - S8M	1760	69,29	220
1776 - S8M	1776	69,92	222
1800 - S8M	1800	70,87	225
1816 - S8M	1816	71,50	227
1912 - S8M	1912	75,28	239
* 2000 - S8M	2000	78,74	250
* 2024 - S8M	2024	79,68	253
2240 - S8M	2240	88,19	280
* 2272 - S8M	2272	89,45	284
2392 - S8M	2392	94,17	299
2800 - S8M	2800	110,24	350
2848 - S8M	2848	112,13	356





RO-DRIVE TORQUE Synchronous Belts

8M HTD
14M HTD



SECTION		8M HTD	14M HTD
Tooth pitch	t [mm]	8	14
Belt thickness	h _s [mm]	5,60	10,00
Tooth height	h _t [mm]	3,40	6,10

* On request

Section 8M HTD

Section	L _w (mm)	L _w (inch)	z
* 288 - 8M TORQUE	288,00	11,34	36
* 304 - 8M TORQUE	304,00	11,97	38
* 352 - 8M TORQUE	352,00	13,86	44
376 - 8M TORQUE	376,00	14,80	47
* 416 - 8M TORQUE	416,00	16,38	52
* 424 - 8M TORQUE	424,00	16,69	53
472 - 8M TORQUE	472,00	18,58	59
480 - 8M TORQUE	480,00	18,90	60
560 - 8M TORQUE	560,00	22,05	70
600 - 8M TORQUE	600,00	23,62	75
624 - 8M TORQUE	624,00	24,57	78
640 - 8M TORQUE	640,00	25,20	80
656 - 8M TORQUE	656,00	25,83	82
720 - 8M TORQUE	720,00	28,35	90
776 - 8M TORQUE	776,00	30,55	97
784 - 8M TORQUE	784,00	30,87	98
800 - 8M TORQUE	800,00	31,50	100
880 - 8M TORQUE	880,00	34,65	110
912 - 8M TORQUE	912,00	35,91	114
920 - 8M TORQUE	920,00	36,22	115
960 - 8M TORQUE	960,00	37,80	120
1040 - 8M TORQUE	1040,00	40,94	130
1120 - 8M TORQUE	1120,00	44,09	140
1200 - 8M TORQUE	1200,00	47,24	150
1280 - 8M TORQUE	1280,00	50,39	160
1304 - 8M TORQUE	1304,00	51,34	163
1328 - 8M TORQUE	1328,00	52,28	166
1360 - 8M TORQUE	1360,00	53,54	170
1424 - 8M TORQUE	1424,00	56,06	178
1440 - 8M TORQUE	1440,00	56,69	180
1600 - 8M TORQUE	1600,00	62,99	200
1760 - 8M TORQUE	1760,00	69,29	220
1800 - 8M TORQUE	1800,00	70,87	225
2000 - 8M TORQUE	2000,00	78,74	250
2248 - 8M TORQUE	2248,00	88,50	281
2400 - 8M TORQUE	2400,00	94,49	300
2800 - 8M TORQUE	2800,00	110,24	350
* 3008 - 8M TORQUE	3008,00	118,42	376
* 3408 - 8M TORQUE	3408,00	134,17	426
* 3808 - 8M TORQUE	3808,00	149,92	476


Section 14M HTD

Section	L _w (mm)	L _w (inch)	z
966 - 14M TORQUE	966,00	38,03	69
1190 - 14M TORQUE	1190,00	46,85	85
1400 - 14M TORQUE	1400,00	55,12	100
1610 - 14M TORQUE	1610,00	63,39	115
1778 - 14M TORQUE	1778,00	70,00	127
1890 - 14M TORQUE	1890,00	74,41	135
2100 - 14M TORQUE	2100,00	82,68	150
2310 - 14M TORQUE	2310,00	90,94	165
2450 - 14M TORQUE	2450,00	96,46	175
2590 - 14M TORQUE	2590,00	101,97	185
2800 - 14M TORQUE	2800,00	110,24	200
3150 - 14M TORQUE	3150,00	124,02	225
3500 - 14M TORQUE	3500,00	137,80	250
3850 - 14M TORQUE	3850,00	151,57	275
4326 - 14M TORQUE	4326,00	170,31	309
4578 - 14M TORQUE	4578,00	180,24	327

PROGRAM
34



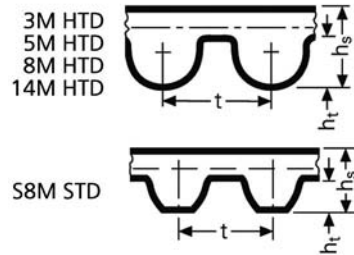RO-DRIVE PLUS Synchronous Belts



SECTION		3M HTD	5M HTD	8M HTD	14M HTD	S8M STD
Tooth pitch	t [mm]	3	5	8	14	8
Belt thickness	h _s [mm]	2,40	3,60	5,60	10,00	5,30
Tooth height	h _t [mm]	1,20	2,10	3,40	6,10	2,95

* On request

Section 3M HTD

Section	L _w (mm)	L _w (inch)	z
* 111 - 3M PLUS	111,00	4,37	37
* 117 - 3M PLUS	117,00	4,61	39
* 129 - 3M PLUS	129,00	5,08	43
* 141 - 3M PLUS	141,00	5,55	47
* 144 - 3M PLUS	144,00	5,67	48
150 - 3M PLUS	150,00	5,91	50
* 156 - 3M PLUS	156,00	6,14	52
* 159 - 3M PLUS	159,00	6,26	53
* 168 - 3M PLUS	168,00	6,61	56
* 174 - 3M PLUS	174,00	6,85	58
* 177 - 3M PLUS	177,00	6,97	59
180 - 3M PLUS	180,00	7,09	60
* 186 - 3M PLUS	186,00	7,32	62
* 192 - 3M PLUS	192,00	7,56	64
* 201 - 3M PLUS	201,00	7,91	67
* 204 - 3M PLUS	204,00	8,03	68
* 210 - 3M PLUS	210,00	8,27	70
* 213 - 3M PLUS	213,00	8,39	71
216 - 3M PLUS	216,00	8,50	72
225 - 3M PLUS	225,00	8,86	75
* 240 - 3M PLUS	240,00	9,45	80
246 - 3M PLUS	246,00	9,69	82
* 252 - 3M PLUS	252,00	9,92	84
* 255 - 3M PLUS	255,00	10,04	85
* 267 - 3M PLUS	267,00	10,51	89
* 285 - 3M PLUS	285,00	11,22	95
* 294 - 3M PLUS	294,00	11,57	98
* 300 - 3M PLUS	300,00	11,81	100
* 312 - 3M PLUS	312,00	12,28	104
* 318 - 3M PLUS	318,00	12,52	106
* 336 - 3M PLUS	336,00	13,23	112
* 339 - 3M PLUS	339,00	13,35	113
* 363 - 3M PLUS	363,00	14,29	121
* 384 - 3M PLUS	384,00	15,12	128
* 390 - 3M PLUS	390,00	15,35	130
* 393 - 3M PLUS	393,00	15,47	131
* 420 - 3M PLUS	420,00	16,54	140
* 447 - 3M PLUS	447,00	17,60	149
* 474 - 3M PLUS	474,00	18,66	158
* 480 - 3M PLUS	480,00	18,90	160
* 486 - 3M PLUS	486,00	19,13	162
* 489 - 3M PLUS	489,00	19,25	163
* 495 - 3M PLUS	495,00	19,49	165
* 501 - 3M PLUS	501,00	19,72	167
* 513 - 3M PLUS	513,00	20,20	171
* 522 - 3M PLUS	522,00	20,55	174
* 525 - 3M PLUS	525,00	20,67	175
* 537 - 3M PLUS	537,00	21,14	179
* 564 - 3M PLUS	564,00	22,20	188
* 570 - 3M PLUS	570,00	22,44	190
* 597 - 3M PLUS	597,00	23,50	199
* 600 - 3M PLUS	600,00	23,62	200
* 606 - 3M PLUS	606,00	23,86	202
* 612 - 3M PLUS	612,00	24,09	204

Section 3M HTD

Section	L _w (mm)	L _w (inch)	z
* 633 - 3M PLUS	633,00	24,92	211
* 669 - 3M PLUS	669,00	26,34	223
* 708 - 3M PLUS	708,00	27,87	236
* 711 - 3M PLUS	711,00	27,99	237
* 738 - 3M PLUS	738,00	29,06	246
* 753 - 3M PLUS	753,00	29,65	251
* 822 - 3M PLUS	822,00	32,36	274
* 843 - 3M PLUS	843,00	33,19	281
* 882 - 3M PLUS	882,00	34,72	294
* 945 - 3M PLUS	945,00	37,20	315
* 960 - 3M PLUS	960,00	37,80	320
* 1041 - 3M PLUS	1041,00	40,98	347
* 1068 - 3M PLUS	1068,00	42,05	356
* 1071 - 3M PLUS	1071,00	42,17	357
* 1125 - 3M PLUS	1125,00	44,29	375
* 1176 - 3M PLUS	1176,00	46,30	392
* 1245 - 3M PLUS	1245,00	49,02	415
* 1569 - 3M PLUS	1569,00	61,77	523

Section 5M HTD

Section	L _w (mm)	L _w (inch)	z
225 - 5M PLUS	225,00	8,86	45
265 - 5M PLUS	265,00	10,43	53
275 - 5M PLUS	275,00	10,83	55
295 - 5M PLUS	295,00	11,61	59
300 - 5M PLUS	300,00	11,81	60
330 - 5M PLUS	330,00	12,99	66
350 - 5M PLUS	350,00	13,78	70
375 - 5M PLUS	375,00	14,76	75
400 - 5M PLUS	400,00	15,75	80
425 - 5M PLUS	425,00	16,73	85
450 - 5M PLUS	450,00	17,72	90
460 - 5M PLUS	460,00	18,11	92
475 - 5M PLUS	475,00	18,70	95
500 - 5M PLUS	500,00	19,69	100
525 - 5M PLUS	525,00	20,67	105
535 - 5M PLUS	535,00	21,06	107
550 - 5M PLUS	550,00	21,65	110
565 - 5M PLUS	565,00	22,24	113
600 - 5M PLUS	600,00	23,62	120
615 - 5M PLUS	615,00	24,21	123
620 - 5M PLUS	620,00	24,41	124
630 - 5M PLUS	630,00	24,80	126
635 - 5M PLUS	635,00	25,00	127
665 - 5M PLUS	665,00	26,18	133
700 - 5M PLUS	700,00	27,56	140
710 - 5M PLUS	710,00	27,95	142
740 - 5M PLUS	740,00	29,13	148
755 - 5M PLUS	755,00	29,72	151
800 - 5M PLUS	800,00	31,50	160
835 - 5M PLUS	835,00	32,87	167
840 - 5M PLUS	840,00	33,07	168
860 - 5M PLUS	860,00	33,86	172





RO-DRIVE PLUS Synchronous Belts

Section 5M HTD

Section	L _w (mm)	L _w (inch)	z
890 - 5M PLUS	890,00	35,04	178
900 - 5M PLUS	900,00	35,43	180
925 - 5M PLUS	925,00	36,42	185
* 950 - 5M PLUS	950,00	37,40	190
1000 - 5M PLUS	1000,00	39,37	200
1050 - 5M PLUS	1050,00	41,34	210
1125 - 5M PLUS	1125,00	44,29	225
1200 - 5M PLUS	1200,00	47,24	240
1270 - 5M PLUS	1270,00	50,00	254
1500 - 5M PLUS	1500,00	59,06	300
1595 - 5M PLUS	1595,00	62,80	319
1690 - 5M PLUS	1690,00	66,54	338
1790 - 5M PLUS	1790,00	70,47	358
1800 - 5M PLUS	1800,00	70,87	360
2000 - 5M PLUS	2000,00	78,74	400

Section 14M HTD

Section	L _w (mm)	L _w (inch)	z
1890 - 14M PLUS	1890,00	74,41	135
2100 - 14M PLUS	2100,00	82,68	150
2310 - 14M PLUS	2310,00	90,94	165
2450 - 14M PLUS	2450,00	96,46	175
2590 - 14M PLUS	2590,00	101,97	185
2800 - 14M PLUS	2800,00	110,24	200
3150 - 14M PLUS	3150,00	124,02	225
3500 - 14M PLUS	3500,00	137,80	250
3850 - 14M PLUS	3850,00	151,57	275
4326 - 14M PLUS	4326,00	170,31	309
4578 - 14M PLUS	4578,00	180,24	327

Section 8M HTD

Section	L _w (mm)	L _w (inch)	z
288 - 8M PLUS	288,00	11,34	36
304 - 8M PLUS	304,00	11,97	38
352 - 8M PLUS	352,00	13,86	44
376 - 8M PLUS	376,00	14,80	47
416 - 8M PLUS	416,00	16,38	52
424 - 8M PLUS	424,00	16,69	53
472 - 8M PLUS	472,00	18,58	59
480 - 8M PLUS	480,00	18,90	60
560 - 8M PLUS	560,00	22,05	70
600 - 8M PLUS	600,00	23,62	75
624 - 8M PLUS	624,00	24,57	78
640 - 8M PLUS	640,00	25,20	80
656 - 8M PLUS	656,00	25,83	82
720 - 8M PLUS	720,00	28,35	90
776 - 8M PLUS	776,00	30,55	97
784 - 8M PLUS	784,00	30,87	98
800 - 8M PLUS	800,00	31,50	100
880 - 8M PLUS	880,00	34,65	110
912 - 8M PLUS	912,00	35,91	114
920 - 8M PLUS	920,00	36,22	115
960 - 8M PLUS	960,00	37,80	120
1040 - 8M PLUS	1040,00	40,94	130
1120 - 8M PLUS	1120,00	44,09	140
1200 - 8M PLUS	1200,00	47,24	150
1280 - 8M PLUS	1280,00	50,39	160
1304 - 8M PLUS	1304,00	51,34	163
1328 - 8M PLUS	1328,00	52,28	166
1360 - 8M PLUS	1360,00	53,54	170
1424 - 8M PLUS	1424,00	56,06	178
1440 - 8M PLUS	1440,00	56,69	180
1600 - 8M PLUS	1600,00	62,99	200
1760 - 8M PLUS	1760,00	69,29	220
1800 - 8M PLUS	1800,00	70,87	225
2000 - 8M PLUS	2000,00	78,74	250
2248 - 8M PLUS	2248,00	88,50	281
2400 - 8M PLUS	2400,00	94,49	300
2800 - 8M PLUS	2800,00	110,24	350
* 3008 - 8M PLUS	3008,00	118,42	376
* 3408 - 8M PLUS	3408,00	134,17	426
* 3808 - 8M PLUS	3808,00	149,92	476

Section S8M STD

Section	L _w (mm)	L _w (inch)	z
440 - S8M PLUS	440,00	17,32	55
480 - S8M PLUS	480,00	18,90	60
528 - S8M PLUS	528,00	20,79	66
560 - S8M PLUS	560,00	22,05	70
600 - S8M PLUS	600,00	23,62	75
632 - S8M PLUS	632,00	24,88	79
640 - S8M PLUS	640,00	25,20	80
656 - S8M PLUS	656,00	25,83	82
672 - S8M PLUS	672,00	26,46	84
688 - S8M PLUS	688,00	27,09	86
696 - S8M PLUS	696,00	27,40	87
712 - S8M PLUS	712,00	28,03	89
720 - S8M PLUS	720,00	28,35	90
728 - S8M PLUS	728,00	28,66	91
736 - S8M PLUS	736,00	28,98	92
760 - S8M PLUS	760,00	29,92	95
768 - S8M PLUS	768,00	30,24	96
784 - S8M PLUS	784,00	30,87	98
792 - S8M PLUS	792,00	31,18	99
800 - S8M PLUS	800,00	31,50	100
824 - S8M PLUS	824,00	32,44	103
848 - S8M PLUS	848,00	33,39	106
864 - S8M PLUS	864,00	34,02	108
880 - S8M PLUS	880,00	34,65	110
912 - S8M PLUS	912,00	35,91	114
920 - S8M PLUS	920,00	36,22	115
944 - S8M PLUS	944,00	37,17	118
960 - S8M PLUS	960,00	37,80	120
992 - S8M PLUS	992,00	39,06	124
1000 - S8M PLUS	1000,00	39,37	125
1056 - S8M PLUS	1056,00	41,57	132
1064 - S8M PLUS	1064,00	41,89	133
1072 - S8M PLUS	1072,00	42,20	134
1120 - S8M PLUS	1120,00	44,09	140
1136 - S8M PLUS	1136,00	44,72	142
1160 - S8M PLUS	1160,00	45,67	145
1168 - S8M PLUS	1168,00	45,98	146
1176 - S8M PLUS	1176,00	46,30	147
1184 - S8M PLUS	1184,00	46,61	148
1200 - S8M PLUS	1200,00	47,24	150
1216 - S8M PLUS	1216,00	47,87	152
1240 - S8M PLUS	1240,00	48,82	155
1256 - S8M PLUS	1256,00	49,45	157
1264 - S8M PLUS	1264,00	49,76	158
1280 - S8M PLUS	1280,00	50,39	160
1296 - S8M PLUS	1296,00	51,02	162
1304 - S8M PLUS	1304,00	51,34	163
1312 - S8M PLUS	1312,00	51,65	164
1344 - S8M PLUS	1344,00	52,91	168
1368 - S8M PLUS	1368,00	53,86	171
1400 - S8M PLUS	1400,00	55,12	175
1408 - S8M PLUS	1408,00	55,43	176
1440 - S8M PLUS	1440,00	56,69	180

Section 14M HTD

Section	L _w (mm)	L _w (inch)	z
966 - 14M PLUS	966,00	38,03	69
1190 - 14M PLUS	1190,00	46,85	85
1400 - 14M PLUS	1400,00	55,12	100
1610 - 14M PLUS	1610,00	63,39	115
1778 - 14M PLUS	1778,00	70,00	127





RO-DRIVE PLUS Synchronous Belts


Section S8M STD

Section	L _w (mm)	L _w (inch)	z
1480 - S8M PLUS	1480,00	58,27	185
1512 - S8M PLUS	1512,00	59,53	189
1552 - S8M PLUS	1552,00	61,10	194
1600 - S8M PLUS	1600,00	62,99	200
1624 - S8M PLUS	1624,00	63,94	203
1760 - S8M PLUS	1760,00	69,29	220
1776 - S8M PLUS	1776,00	69,92	222
1800 - S8M PLUS	1800,00	70,87	225
1816 - S8M PLUS	1816,00	71,50	227
1912 - S8M PLUS	1912,00	75,28	239
2240 - S8M PLUS	2240,00	88,19	280
2392 - S8M PLUS	2392,00	94,17	299
2800 - S8M PLUS	2800,00	110,24	350
2848 - S8M PLUS	2848,00	112,13	356





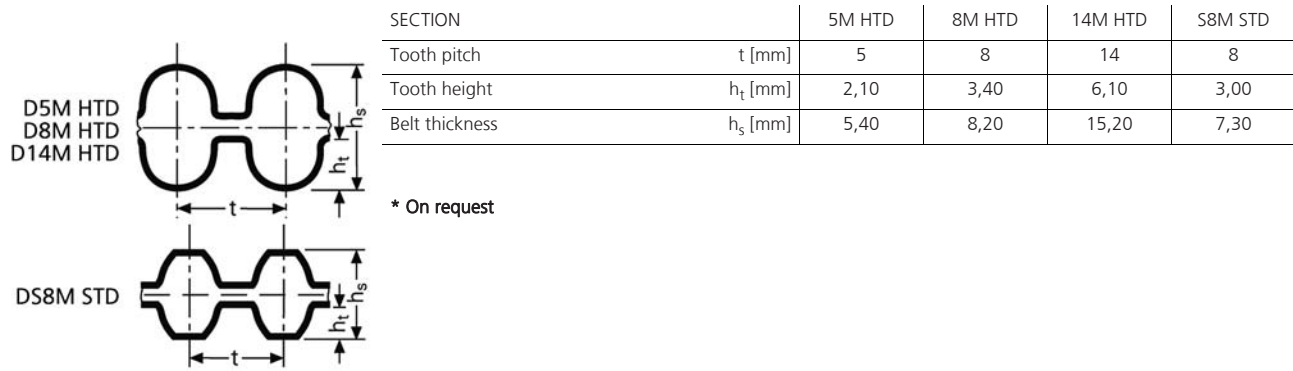RO-DRIVE TWIN PLUS Double-Sided Synchronous Belts



PROGRAM
34

Section D5M DHTD

Section	L _w (mm)	L _w (inch)	z
* 565 - D5M PLUS	565,00	22,24	113
* 600 - D5M PLUS	600,00	23,62	120
* 615 - D5M PLUS	615,00	24,21	123
* 620 - D5M PLUS	620,00	24,41	124
* 630 - D5M PLUS	630,00	24,80	126
* 635 - D5M PLUS	635,00	25,00	127
* 665 - D5M PLUS	665,00	26,18	133
* 700 - D5M PLUS	700,00	27,56	140
* 710 - D5M PLUS	710,00	27,95	142
* 740 - D5M PLUS	740,00	29,13	148
* 755 - D5M PLUS	755,00	29,72	151
* 800 - D5M PLUS	800,00	31,50	160
* 835 - D5M PLUS	835,00	32,87	167
* 840 - D5M PLUS	840,00	33,07	168
* 860 - D5M PLUS	860,00	33,86	172
* 890 - D5M PLUS	890,00	35,04	178
* 900 - D5M PLUS	900,00	35,43	180
* 925 - D5M PLUS	925,00	36,42	185
* 1000 - D5M PLUS	1000,00	39,37	200
* 1050 - D5M PLUS	1050,00	41,34	210
* 1125 - D5M PLUS	1125,00	44,29	225
* 1200 - D5M PLUS	1200,00	47,24	240
* 1270 - D5M PLUS	1270,00	50,00	254
* 1420 - D5M PLUS	1420,00	55,91	284
* 1500 - D5M PLUS	1500,00	59,06	300
* 1595 - D5M PLUS	1595,00	62,80	319
* 1690 - D5M PLUS	1690,00	66,54	338
* 2000 - D5M PLUS	2000,00	78,74	400

Section D8M DHTD

Section	L _w (mm)	L _w (inch)	z
* 1440 - D8M PLUS	1440,00	56,69	180
* 1600 - D8M PLUS	1600,00	62,99	200
* 1760 - D8M PLUS	1760,00	69,29	220
* 1800 - D8M PLUS	1800,00	70,87	225
* 2000 - D8M PLUS	2000,00	78,74	250
* 2248 - D8M PLUS	2248,00	88,50	281
* 2400 - D8M PLUS	2400,00	94,49	311
* 2600 - D8M PLUS	2600,00	102,36	325

Section D14M DHTD

Section	L _w (mm)	L _w (inch)	z
* 966 - D14M PLUS	966	38,03	69
* 1190 - D14M PLUS	1190	46,85	85
* 1400 - D14M PLUS	1400	55,12	100
* 1610 - D14M PLUS	1610	63,39	115
* 1778 - D14M PLUS	1778	70,00	127
* 1890 - D14M PLUS	1890	74,41	135
* 2100 - D14M PLUS	2100	82,68	150
* 2310 - D14M PLUS	2310	90,94	165

Section DS8M DSTD

Section	L _w (mm)	L _w (inch)	z
* 600 - DS8M PLUS	600,00	23,62	75
* 632 - DS8M PLUS	632,00	24,88	79
* 640 - DS8M PLUS	640,00	25,20	80
* 656 - DS8M PLUS	656,00	25,83	82
* 672 - DS8M PLUS	672,00	26,46	84
* 688 - DS8M PLUS	688,00	27,09	86
* 696 - DS8M PLUS	696,00	27,40	87
* 712 - DS8M PLUS	712,00	28,03	89
* 720 - DS8M PLUS	720,00	28,35	90
* 728 - DS8M PLUS	728,00	28,66	91
* 736 - DS8M PLUS	736,00	28,98	92
* 760 - DS8M PLUS	760,00	29,92	95
* 768 - DS8M PLUS	768,00	30,24	96
* 784 - DS8M PLUS	784,00	30,87	98
* 792 - DS8M PLUS	792,00	31,18	99
* 800 - DS8M PLUS	800,00	31,50	100
* 824 - DS8M PLUS	824,00	32,44	103
* 848 - DS8M PLUS	848,00	33,39	106
* 864 - DS8M PLUS	864,00	34,02	108
* 880 - DS8M PLUS	880,00	34,65	110
* 912 - DS8M PLUS	912,00	35,91	114
* 920 - DS8M PLUS	920,00	36,22	115
* 944 - DS8M PLUS	944,00	37,17	118
* 960 - DS8M PLUS	960,00	37,80	120
* 992 - DS8M PLUS	992,00	39,06	124
* 1000 - DS8M PLUS	1000,00	39,37	125
* 1056 - DS8M PLUS	1056,00	41,57	132
* 1064 - DS8M PLUS	1064,00	41,89	133

Section D8M DHTD

Section	L _w (mm)	L _w (inch)	z
* 600 - D8M PLUS	600,00	23,62	75
* 624 - D8M PLUS	624,00	24,57	78
* 640 - D8M PLUS	640,00	25,20	80
* 656 - D8M PLUS	656,00	25,83	82
* 720 - D8M PLUS	720,00	28,35	90
* 776 - D8M PLUS	776,00	30,55	97
* 784 - D8M PLUS	784,00	30,87	98
* 800 - D8M PLUS	800,00	31,50	100
* 880 - D8M PLUS	880,00	34,65	110
* 912 - D8M PLUS	912,00	35,91	114
* 920 - D8M PLUS	920,00	36,22	115
* 960 - D8M PLUS	960,00	37,80	120
* 1040 - D8M PLUS	1040,00	40,94	130
* 1120 - D8M PLUS	1120,00	44,09	140
* 1200 - D8M PLUS	1200,00	47,24	150
* 1280 - D8M PLUS	1280,00	50,39	160
* 1304 - D8M PLUS	1304,00	51,34	163
* 1328 - D8M PLUS	1328,00	52,28	166
* 1360 - D8M PLUS	1360,00	53,54	170
* 1424 - D8M PLUS	1424,00	56,06	178



RO-DRIVE TWIN PLUS Double-Sided Synchronous Belts


Section DS8M DSTD

Section	L _w (mm)	L _w (inch)	z
* 1072 - DS8M PLUS	1072,00	42,20	134
* 1120 - DS8M PLUS	1120,00	44,09	140
* 1136 - DS8M PLUS	1136,00	44,72	142
* 1160 - DS8M PLUS	1160,00	45,67	145
* 1168 - DS8M PLUS	1168,00	45,98	146
* 1176 - DS8M PLUS	1176,00	46,30	147
* 1184 - DS8M PLUS	1184,00	46,61	148
* 1200 - DS8M PLUS	1200,00	47,24	150
* 1216 - DS8M PLUS	1216,00	47,87	152
* 1240 - DS8M PLUS	1240,00	48,82	155
* 1256 - DS8M PLUS	1256,00	49,45	157
* 1264 - DS8M PLUS	1264,00	49,76	158
* 1280 - DS8M PLUS	1280,00	50,39	160
* 1296 - DS8M PLUS	1296,00	51,02	162
* 1304 - DS8M PLUS	1304,00	51,34	163
* 1312 - DS8M PLUS	1312,00	51,65	164
* 1344 - DS8M PLUS	1344,00	52,91	168
* 1368 - DS8M PLUS	1368,00	53,86	171
* 1400 - DS8M PLUS	1400,00	55,12	175
* 1408 - DS8M PLUS	1408,00	55,43	176
* 1440 - DS8M PLUS	1440,00	56,69	180
* 1480 - DS8M PLUS	1480,00	58,27	185
* 1512 - DS8M PLUS	1512,00	59,53	189
* 1552 - DS8M PLUS	1552,00	61,10	194
* 1600 - DS8M PLUS	1600,00	62,99	200
* 1624 - DS8M PLUS	1624,00	63,94	203
* 1760 - DS8M PLUS	1760,00	69,29	220
* 1776 - DS8M PLUS	1776,00	69,92	222
* 1800 - DS8M PLUS	1800,00	70,87	225
* 1816 - DS8M PLUS	1816,00	71,50	227
* 1912 - DS8M PLUS	1912,00	75,28	239
* 2240 - DS8M PLUS	2240,00	88,19	280
* 2392 - DS8M PLUS	2392,00	94,17	299





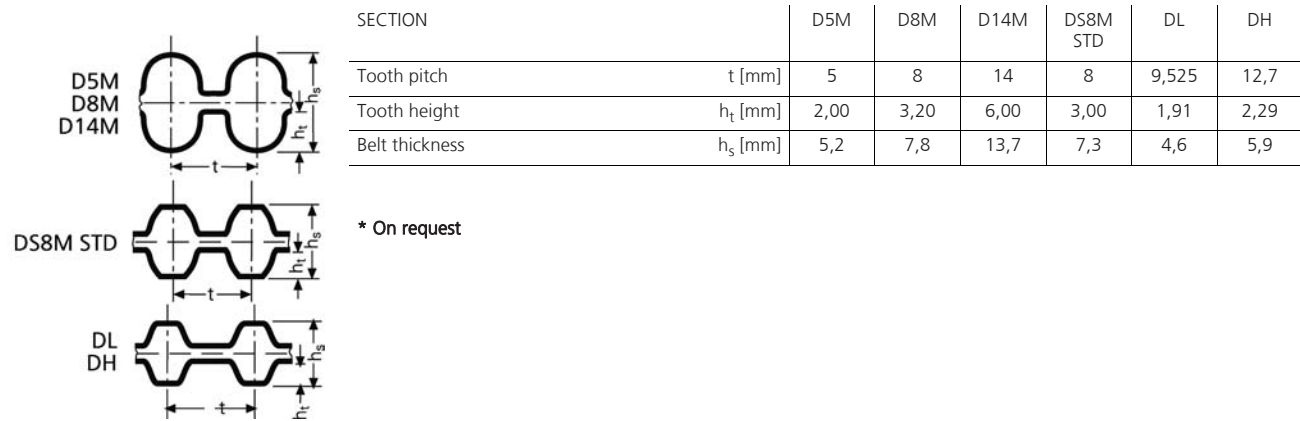RO-DRIVE TWIN Double-Sided Synchronous Belts



PROGRAM 34

Section D5M DHTD

Section	L _w (mm)	L _w (inch)	z
565 - D5M	565,00	22,24	113
600 - D5M	600,00	23,62	120
615 - D5M	615,00	24,21	123
620 - D5M	620,00	24,41	124
630 - D5M	630,00	24,80	126
635 - D5M	635,00	25,00	127
665 - D5M	665,00	26,18	133
700 - D5M	700,00	27,56	140
710 - D5M	710,00	27,95	142
740 - D5M	740,00	29,13	148
755 - D5M	755,00	29,72	151
800 - D5M	800,00	31,50	160
835 - D5M	835,00	32,87	167
840 - D5M	840,00	33,07	168
* 850 - D5M	850,00	33,46	170
860 - D5M	860,00	33,86	172
890 - D5M	890,00	35,04	178
900 - D5M	900,00	35,43	180
925 - D5M	925,00	36,42	185
* 950 - D5M	950,00	37,40	190
1000 - D5M	1000,00	39,37	200
1050 - D5M	1050,00	41,34	210
* 1100 - D5M	1100,00	43,31	220
1125 - D5M	1125,00	44,29	225
1200 - D5M	1200,00	47,24	240
1270 - D5M	1270,00	50,00	254
1420 - D5M	1420,00	55,91	284
1500 - D5M	1500,00	59,06	300
1595 - D5M	1595,00	62,80	319
1690 - D5M	1690,00	66,54	338
* 1790 - D5M	1790,00	70,47	358
* 1800 - D5M	1800,00	70,87	360
* 1870 - D5M	1870,00	73,62	374
* 1985 - D5M	1985,00	78,15	379
2000 - D5M	2000,00	78,74	400

Section D8M DHTD

Section	L _w (mm)	L _w (inch)	z
880 - D8M	880,00	34,65	110
912 - D8M	912,00	35,91	114
920 - D8M	920,00	36,22	115
960 - D8M	960,00	37,80	120
1040 - D8M	1040,00	40,94	130
1120 - D8M	1120,00	44,09	140
1200 - D8M	1200,00	47,24	150
* 1224 - D8M	1224,00	48,19	153
1280 - D8M	1280,00	50,39	160
1304 - D8M	1304,00	51,34	163
1328 - D8M	1328,00	52,28	166
1360 - D8M	1360,00	53,54	170
1424 - D8M	1424,00	56,06	178
1440 - D8M	1440,00	56,69	180
1600 - D8M	1600,00	62,99	200
1760 - D8M	1760,00	69,29	220
1800 - D8M	1800,00	70,87	225
2000 - D8M	2000,00	78,74	250
* 2200 - D8M	2200,00	86,61	275
2248 - D8M	2248,00	88,50	281
2400 - D8M	2400,00	94,49	300
2600 - D8M	2600,00	102,36	325
* 2800 - D8M	2800,00	110,24	350
* 3048 - D8M	3048,00	120,00	381
* 3280 - D8M	3280,00	129,13	381
* 3600 - D8M	3600,00	141,73	450
* 4400 - D8M	4400,00	173,23	550

Section D14M DHTD

Section	L _w (mm)	L _w (inch)	z
966 - D14M	966,00	38,03	69
1190 - D14M	1190,00	46,85	85
1400 - D14M	1400,00	55,12	100
1610 - D14M	1610,00	63,39	115
* 1764 - D14M	1764,00	69,45	126
1778 - D14M	1778,00	70,00	127
1890 - D14M	1890,00	74,41	135
2100 - D14M	2100,00	82,68	150
2310 - D14M	2310,00	90,94	165
* 2450 - D14M	2450,00	96,46	175
* 2590 - D14M	2590,00	101,97	185
* 2800 - D14M	2800,00	110,24	200
* 3150 - D14M	3150,00	124,02	225
* 3360 - D14M	3360,00	132,28	240
* 3500 - D14M	3500,00	137,80	250
* 3850 - D14M	3850,00	151,57	275
* 4326 - D14M	4326,00	170,31	309
* 4578 - D14M	4578,00	180,24	327
* 4956 - D14M	4956,00	195,12	354

Section D8M DHTD

Section	L _w (mm)	L _w (inch)	z
600 - D8M	600,00	23,62	75
624 - D8M	624,00	24,57	78
* 632 - D8M	632,00	24,88	79
640 - D8M	640,00	25,20	80
656 - D8M	656,00	25,83	82
* 680 - D8M	680,00	26,77	85
720 - D8M	720,00	28,35	90
776 - D8M	776,00	30,55	97
784 - D8M	784,00	30,87	98
800 - D8M	800,00	31,50	100
* 840 - D8M	840,00	33,07	105

RO-DRIVE TWIN Double-Sided Synchronous Belts

Section DS8M DSTD

Section	L _w (mm)	L _w (inch)	z
* 600 - DS8M	600,00	23,62	75
* 632 - DS8M	632,00	24,88	79
* 640 - DS8M	640,00	25,20	80
* 656 - DS8M	656,00	25,83	82
* 672 - DS8M	672,00	26,46	84
* 688 - DS8M	688,00	27,09	86
* 696 - DS8M	696,00	27,40	87
* 712 - DS8M	712,00	28,03	89
* 720 - DS8M	720,00	28,35	90
* 728 - DS8M	728,00	28,66	91
* 736 - DS8M	736,00	28,98	92
* 760 - DS8M	760,00	29,92	95
* 768 - DS8M	768,00	30,24	96
* 784 - DS8M	784,00	30,87	98
* 792 - DS8M	792,00	31,18	99
* 800 - DS8M	800,00	31,50	100
* 824 - DS8M	824,00	32,44	103
* 848 - DS8M	848,00	33,39	106
* 864 - DS8M	864,00	34,02	108
* 880 - DS8M	880,00	34,65	110
* 912 - DS8M	912,00	35,91	114
* 920 - DS8M	920,00	36,22	115
* 944 - DS8M	944,00	37,17	118
* 960 - DS8M	960,00	37,80	120
* 992 - DS8M	992,00	39,06	124
* 1000 - DS8M	1000,00	39,37	125
* 1056 - DS8M	1056,00	41,57	132
* 1064 - DS8M	1064,00	41,89	133
* 1072 - DS8M	1072,00	42,20	134
* 1120 - DS8M	1120,00	44,09	140
* 1136 - DS8M	1136,00	44,72	142
* 1160 - DS8M	1160,00	45,67	145
* 1168 - DS8M	1168,00	45,98	146
* 1176 - DS8M	1176,00	46,30	147
* 1184 - DS8M	1184,00	46,61	148
* 1200 - DS8M	1200,00	47,24	150
* 1216 - DS8M	1216,00	47,87	152
* 1240 - DS8M	1240,00	48,82	155
* 1256 - DS8M	1256,00	49,45	157
* 1264 - DS8M	1264,00	49,76	158
* 1280 - DS8M	1280,00	50,39	160
* 1296 - DS8M	1296,00	51,02	162
* 1304 - DS8M	1304,00	51,34	163
* 1312 - DS8M	1312,00	51,65	164
* 1344 - DS8M	1344,00	52,91	168
* 1368 - DS8M	1368,00	53,86	171
* 1400 - DS8M	1400,00	55,12	175
* 1408 - DS8M	1408,00	55,43	176
* 1440 - DS8M	1440,00	56,69	180
* 1480 - DS8M	1480,00	58,27	185
* 1512 - DS8M	1512,00	59,53	189
* 1552 - DS8M	1552,00	61,10	194
* 1600 - DS8M	1600,00	62,99	200
* 1624 - DS8M	1624,00	63,94	203
* 1760 - DS8M	1760,00	69,29	220
* 1776 - DS8M	1776,00	69,92	222
* 1800 - DS8M	1800,00	70,87	225
* 1816 - DS8M	1816,00	71,50	227
* 1912 - DS8M	1912,00	75,28	239
* 2240 - DS8M	2240,00	88,19	280
* 2392 - DS8M	2392,00	94,17	299

Section DL

Section	L _w (mm)	L _w (inch)	z
* 210 DL	533,40	21,00	56
* 225 DL	571,50	22,50	60
* 240 DL	609,60	24,00	64
* 255 DL	647,70	25,50	68
* 270 DL	658,80	25,94	72
* 285 DL	723,90	28,50	76
* 300 DL	762,00	30,00	80
* 322 DL	819,15	32,25	86
* 345 DL	876,30	34,50	92
* 367 DL	933,45	36,75	98
* 390 DL	990,60	39,00	104
* 420 DL	1066,80	42,00	112
* 450 DL	1143,00	45,00	120
* 480 DL	1219,20	48,00	128
* 510 DL	1295,40	51,00	136
* 540 DL	1371,60	54,00	144
* 600 DL	1524,00	60,00	160
* 660 DL	1676,40	66,00	176

Section DH

Section	L _w (mm)	L _w (inch)	z
* 240 DH	609,60	24,00	48
270 DH	685,80	27,00	54
300 DH	762,00	30,00	60
330 DH	838,20	33,00	66
335 DH	850,90	33,50	67
360 DH	914,40	36,00	72
370 DH	939,80	37,00	74
390 DH	990,60	39,00	78
420 DH	1066,80	42,00	84
450 DH	1143,00	45,00	90
480 DH	1219,20	48,00	96
510 DH	1295,40	51,00	102
540 DH	1371,60	54,00	108
570 DH	1447,80	57,00	114
600 DH	1524,00	60,00	120
630 DH	1600,20	63,00	126
660 DH	1676,40	66,00	132
700 DH	1778,00	70,00	140
730 DH	1854,20	73,00	146
750 DH	1905,00	75,00	150
* 800 DH	2032,00	80,00	160
* 850 DH	2159,00	85,00	170
* 900 DH	2286,00	90,00	180
* 1000 DH	2540,00	100,00	200
* 1100 DH	2794,00	110,00	220
* 1250 DH	3175,00	125,00	250
* 1400 DH	3556,00	140,00	280
* 1700 DH	4318,00	170,00	340

Section DL

Section	L _w (mm)	L _w (inch)	z
* 124 DL	314,33	12,38	33
* 150 DL	381,00	15,00	40
* 187 DL	476,25	18,75	50

PROGRAM
34



RO-DRIVE Open Ended Synchronous Belts

SECTION		5M HTD	8M HTD	S8M STD
5M HTD 8M HTD	Tooth pitch	t [mm]	5	8
	Tooth height	h_t [mm]	2,10	2,95
	Belt thickness	h_s [mm]	3,6	5,3

SECTION		5M HTD	8M HTD	S8M STD
S8M STD	Tooth pitch	t [mm]	5	8
	Tooth height	h_t [mm]	2,10	2,95
	Belt thickness	h_s [mm]	3,6	5,3

* On request

Section 5M HTD

Width (mm)	Width (inch)	Roll length (m)
15 *	0,59	62

Section 8M HTD

Width (mm)	Width (inch)	Roll length (m)
10 *	0,39	72
12 *	0,47	60
15 *	0,59	48

Section S8M STD

Width (mm)	Width (inch)	Roll length (m)
12 *	0,47	60
15 *	0,59	48






ROFLEX-VARI Raw-Edge Cogged Belts

ROFLEX-VARI is available according to the following standards: ISO 1604, DIN 7719/1, RMA/MPTA IP-25

Calculation of belt length:



Outer length :

Datum length + belt thickness x 1,57

Datum length :

Outer length - belt thickness x 1,57

Inner length :

Outer length - belt thickness x 6,283

Effective outer length :

Outer length

Belt angle :

Angle of pulley + 2° as empirical formula

* On request

Section 13 x 6

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 402	15,83	13H0440BR
* 427	16,81	13H0465BR
452	17,80	13H0490BR
467	18,39	13H0505BR
477	18,78	13H0515BR
502	19,76	13H0540BR
* 527	20,75	13H0565BR
552	21,73	13H0590BR
602	23,70	13H0640BR
* 627	24,68	13H0665BR
* 652	25,67	13H0690BR
* 677	26,65	13H0715BR
* 700	27,56	13H0738BR
* 702	27,64	13H0740BR
* 727	28,62	13H0765BR
* 752	29,61	13H0790BR
* 802	31,57	13H0840BR
* 852	33,54	13H0890BR
* 902	35,51	13H0940BR
* 950	37,40	13H0988BR
* 952	37,48	13H0990BR
* 1002	39,45	13H1040BR
* 1062	41,81	13H1100BR
* 1122	44,17	13H1160BR
* 1182	46,54	13H1220BR
1252	49,29	13H1290BR
* 1322	52,05	13H1360BR
* 1402	55,20	13H1440BR
* 1502	59,13	13H1540BR

Section 17 x 6

Inner length (inch)	Inner length (inch)	ROULUNDS Number
702	27,64	17H0740BR
752	29,61	17H0790BR
* 770	30,31	17H0808BR
802	31,57	17H0840BR
* 852	33,54	17H0890BR
* 870	34,25	17H0908BR
* 902	35,51	17H0940BR
* 952	37,48	17H0990BR
1002	39,45	17H1040BR
1052	41,42	17H1090BR
* 1100	43,31	17H1140BR
1152	45,35	17H1190BR
* 1202	47,32	17H1240BR
1250	49,21	17H1290BR
* 1302	51,26	17H1340BR
* 1352	53,23	17H1390BR

Section 22 x 8

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 580	22,83	22H0630DR
600	23,62	22H0650DR
610	24,02	22H0660DR
625	24,61	22H0675DR
650	25,59	22H0700DR
675	26,57	22H0725DR
* 689	27,13	22H0739DR
700	27,56	22H0750DR
725	28,54	22H0775DR
750	29,53	22H0800DR
775	30,51	22H0825DR
800	31,50	22H0850DR
850	33,46	22H0900DR
900	35,43	22H0950DR
950	37,40	22H1000DR
1000	39,37	22H1050DR
1060	41,73	22H1110DR
1120	44,09	22H1170DR
1180	46,46	22H1230DR
1225	48,23	22H1275DR
1250	49,21	22H1300DR
1320	51,97	22H1370DR
1400	55,12	22H1450DR
1500	59,06	22H1550DR
* 1600	62,99	22H1650DR
* 1640	64,57	22H1690DR
* 1700	66,93	22H1750DR
* 1800	70,87	22H1850DR
* 1900	74,80	22H1950DR
* 2000	78,74	22H2050DR
* 2120	83,46	22H2170DR

Section 17 x 8

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 700	27,56	17H0750DR
* 800	31,50	17H0850DR
* 1075	42,32	17H1125DR

Section 21 x 6

Inner length (inch)	Inner length (inch)	ROULUNDS Number
532	20,94	21H0570BR
602	23,70	21H0640BR
682	26,85	21H0720BR
772	30,39	21H0810BR
872	34,33	21H0910BR
* 972	38,27	21H1010BR
* 1092	42,99	21H1130BR
* 1222	48,11	21H1260BR

Section 13 x 8

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 550	21,65	13H0600DR
* 700	27,56	13H0750DR

Section 17 x 6

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 408	16,06	17H0448BR
452	17,80	17H0490BR
470	18,50	17H0508BR
502	19,76	17H0540BR
530	20,87	17H0568BR
552	21,73	17H0590BR
570	22,44	17H0608BR
602	23,70	17H0640BR
652	25,67	17H0690BR

Section 22 x 8

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 400	15,75	22H0450DR
* 450	17,72	22H0500DR
485	19,09	22H0535DR
500	19,69	22H0550DR
525	20,67	22H0575DR
550	21,65	22H0600DR
561	22,09	22H0611DR
575	22,64	22H0625DR

Section 24 x 8

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 600	23,62	24H0650DR
* 650	25,59	24H0700DR
* 760	29,92	24H0810DR
* 965	37,99	24H1001DR
* 1145	45,08	24H1195DR
1165	45,87	24H1215DR
* 1525	60,04	24H1575DR
1725	67,91	24H1775DR
* 2160	85,04	24H2210DR

PROGRAM
40

ROFLEX-VARI Raw-Edge Cogged Belts

Section 25 x 8

Inner length (inch)	Inner length (inch)	ROULUNDS Number
630	24,80	25H0680DR
655	25,79	25H0705DR
710	27,95	25H0760DR
750	29,53	25H0800DR
800	31,50	25H0850DR
* 850	33,46	25H0900DR
* 1550	61,02	25H1600DR

Section 26 x 8

Inner length (inch)	Inner length (inch)	ROULUNDS Number
522	20,55	26H0572DR
* 592	23,31	26H0642DR
630	24,80	26H0680DR
655	25,79	26H0705DR
672	26,46	26H0722DR
710	27,95	26H0760DR
750	29,53	26H0800DR
762	30,00	26H0812DR
800	31,50	26H0850DR
850	33,46	26H0900DR
862	33,94	26H0912DR
900	35,43	26H0950DR
* 950	37,40	26H1000DR
962	37,87	26H1012DR
* 1000	39,37	26H1050DR
1010	39,76	26H1060DR
* 1060	41,73	26H1111DR
1082	42,60	26H1132DR
* 1120	44,09	26H1170DR
* 1180	46,46	26H1230DR
* 1212	47,72	26H1262DR
* 1362	53,62	26H1412DR
* 1400	55,12	26H1450DR
* 1562	61,50	26H1612DR
* 1625	63,98	26H1675DR

Section 27 x 8

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 705	27,76	27H0755DR
* 755	29,72	27H0805DR
* 805	31,69	27H0855DR
* 855	33,66	27H0905DR
905	35,63	27H0955DR
1005	39,57	27H1055DR
* 1065	41,93	27H1115DR
* 1125	44,29	27H1175DR
* 1185	46,65	27H1235DR
* 1255	49,41	27H1305DR
* 1305	51,38	27H1355DR
* 1325	52,17	27H1375DR
* 1405	55,31	27H1455DR
* 1505	59,25	27H1555DR
* 1605	63,19	27H1655DR
* 1705	67,13	27H1755DR
1805	71,06	27H1855DR

Section 28 x 8

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 505	19,88	28H0555DR
530	20,87	28H0580DR
* 555	21,85	28H0605DR
605	23,82	28H0655DR

Section 28 x 8

Inner length (inch)	Inner length (inch)	ROULUNDS Number
630	24,80	28H0680DR
650	25,59	28H0700DR
700	27,56	28H0750DR
750	29,53	28H0800DR
805	31,69	28H0855DR
850	33,46	28H0900DR
900	35,43	28H0950DR
950	37,40	28H1000DR
1000	39,37	28H1050DR
* 1010	39,76	28H1060DR
1060	41,73	28H1110DR
1120	44,09	28H1170DR
1180	46,46	28H1230DR
1185	46,65	28H1235DR
* 1200	47,24	28H1250DR
1255	49,41	28H1305DR
1305	51,38	28H1355DR
1320	51,97	28H1370DR
1400	55,12	28H1450DR
* 1450	57,09	28H1500DR
1500	59,06	28H1550DR
1605	63,19	28H1655DR
* 1625	63,98	28H1675DR
1705	67,13	28H1755DR
1805	71,06	28H1855DR
1905	75,00	28H1955DR
2005	78,94	28H2055DR
* 2125	83,66	28H2175DR
* 2240	88,19	28H2295DR
* 2500	98,43	28H2555DR

Section 30 x 10

Inner length (inch)	Inner length (inch)	ROULUNDS Number
617	24,29	30H0680FR
* 650	25,59	30H0713FR
* 700	27,56	30H0763FR
800	31,50	30H0863FR
900	35,43	30H0963FR
* 930	36,61	30H0993FR
* 950	37,40	30H1013FR
* 985	38,78	30H1048FR
1000	39,37	30H1063FR
* 1072	42,20	30H1135FR
* 1080	42,52	30H1143FR
* 1104	43,46	30H1167FR
1120	44,09	30H1183FR
1178	46,38	30H1241FR
* 1200	47,24	30H1263FR
* 1290	50,79	30H1353FR
* 1320	51,97	30H1383FR
* 1337	52,64	30H1400FR
* 1433	56,42	30H1496FR
* 1474	58,03	30H1537FR
* 1647	64,84	30H1710FR
* 1700	66,93	30H1763FR
* 1800	70,87	30H1863FR

Section 32 x 10

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 709	27,91	32H0772FR
750	29,53	32H0813FR
790	31,10	32H0853FR
820	32,28	32H0883FR
850	33,46	32H0913FR

Section 32 x 10

Inner length (inch)	Inner length (inch)	ROULUNDS Number
900	35,43	32H0963FR
950	37,40	32H1013FR
1000	39,37	32H1063FR
* 1060	41,73	32H1123FR
* 1073	42,24	32H1136FR
* 1120	44,09	32H1183FR
* 1180	46,46	32H1243FR
1203	47,36	32H1266FR
1250	49,21	32H1313FR
* 1320	51,97	32H1383FR
* 1353	53,27	32H1416FR
* 1400	55,12	32H1463FR
* 1500	59,06	32H1563FR
* 1520	59,84	32H1583FR
* 1553	61,14	32H1616FR
* 1600	62,99	32H1663FR
* 1700	66,93	32H1763FR
* 1720	67,72	32H1783FR
* 1753	69,02	32H1813FR
* 1953	76,89	32H2016FR

Section 33 x 10

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 753	29,65	33H0816FR
853	33,58	33H0916FR
953	37,52	33H1016FR
1073	42,24	33H1136FR
1203	47,36	33H1266FR
* 1353	53,27	33H1416FR
* 1553	61,14	33H1616FR
* 1753	69,02	33H1816FR

Section 37 x 10

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 597	23,50	37J0660FR
* 622	24,49	37J0685FR
647	25,47	37J0710FR
* 672	26,46	37J0735FR
697	27,44	37J0760FR
* 722	28,43	37J0785FR
747	29,41	37J0810FR
797	31,38	37J0860FR
847	33,35	37J0910FR
897	35,31	37J0960FR
947	37,28	37J1010FR
997	39,25	37J1060FR
1057	41,61	37J1120FR
1117	43,98	37J1180FR
1177	46,34	37J1240FR
* 1189	46,81	37J1252FR
1247	49,09	37J1310FR
1317	51,85	37J1380FR
1397	55,00	37J1460FR
* 1462	57,56	37J1525FR
1497	58,94	37J1560FR
1597	62,87	37J1660FR
1697	66,81	37J1760FR
1797	70,75	37J1860FR
* 1897	74,68	37J1960FR
* 1912	75,28	37J1975FR
1997	78,62	37J2060FR
* 2050	80,71	37J2113FR
* 2117	83,35	37J2180FR
2237	88,07	37J2300FR



ROFLEX-VARI Raw-Edge Cogged Belts

Section 37 x 10

Inner length (inch)	Inner length (inch)	ROULUNDS Number
2497	98,31	37J2560FR
* 2797	110,12	37J2860FR

Section 40 x 12

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 915	36,02	40J0990HR
925	36,42	40J1000HR
1000	39,37	40J1075HR
* 1040	40,94	40J1115HR
1045	41,14	40J1120HR
* 1060	41,73	40J1135HR
* 1120	44,09	40J1195HR
* 1125	44,29	40J1200HR
* 1180	46,46	40J1255HR
* 1195	47,05	40J1270HR
* 1400	55,12	40J1475HR
1500	59,06	40J1575HR
* 1655	65,16	40J1730HR

Section 42 x 12

Inner length (inch)	Inner length (inch)	ROULUNDS Number
900	35,43	42J0975HR
938	36,93	42J1013HR
1000	39,37	42J1075HR
1064	41,89	42J1139HR
1120	44,09	42J1195HR
1194	47,01	42J1269HR
1250	49,21	42J1325HR
1320	51,97	42J1395HR
1344	52,91	42J1419HR
1400	55,12	42J1475HR
1444	56,85	42J1519HR
1544	60,79	42J1619HR
* 1600	62,99	42J1675HR
* 1688	66,46	42J1763HR
* 1700	66,93	42J1775HR
* 1744	68,66	42J1819HR
* 1800	70,87	42J1875HR
1944	76,54	42J2019HR
* 2000	78,74	42J2075HR
2184	85,98	42J2259HR
* 2444	96,22	42J2519HR

Section 47 x 12

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 605	23,82	47J0680HR
* 755	29,72	47J0830HR
* 805	31,69	47J0880HR
855	33,66	47J0930HR
* 880	34,65	47J0955HR
905	35,63	47J0980HR
955	37,60	47J1030HR
1005	39,57	47J1080HR
* 1035	40,75	47J1110HR
* 1044	41,10	47J1119HR
1065	41,93	47J1140HR
1125	44,29	47J1200HR
* 1150	45,28	47J1225HR
1185	46,65	47J1260HR
* 1200	47,24	47J1275HR
1255	49,41	47J1330HR
* 1275	50,20	47J1350HR

Section 47 x 12

Inner length (inch)	Inner length (inch)	ROULUNDS Number
1325	52,17	47J1400HR
1405	55,31	47J1480HR
1440	56,69	47J1515HR
1505	59,25	47J1580HR
* 1570	61,81	47J1645HR
1605	63,19	47J1680HR
* 1645	64,76	47J1720HR
1705	67,13	47J1780HR
* 1745	68,70	47J1820HR
1805	71,06	47J1880HR
1905	75,00	47J1980HR
* 1925	75,79	47J2000HR
2005	78,94	47J2080HR
* 2065	81,30	47J2140HR
2125	83,66	47J2200HR
2215	87,20	47J2290HR
2245	88,39	47J2320HR
2305	90,75	47J2380HR
* 2365	93,11	47J2440HR
* 2405	94,68	47J2480HR
* 2500	98,43	47J2575HR
2505	98,62	47J2580HR
2805	110,43	47J2880HR
* 3155	124,21	47J3230HR

Section 49 x 14

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 1060	41,73	49J1148KR
* 1120	44,09	49J1208KR
* 1250	49,21	49J1338KR
* 1320	51,97	49J1408KR
* 1600	62,99	49J1688KR
* 2120	83,46	49J2208KR

Section 50 x 14

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 1150	45,28	50J1238KR
* 1450	57,09	50J1541KR
* 1517	59,72	50J1605KR
* 2046	80,55	50J2134KR
* 2249	88,54	50J2337KR
* 2452	96,54	50J2540KR

Section 51 x 16

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 1829	72,01	51J1930MR
* 1954	76,93	51J2055MR
* 2724	107,24	51J2825MR
* 2799	110,20	51J2900MR
* 3049	120,04	51J3150MR

Section 52 x 16

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 1045	41,14	52J1145MR
1179	46,42	52J1280MR
1249	49,17	52J1350MR
* 1319	51,93	52J1420MR
1324	52,13	52J1425MR
1399	55,08	52J1500MR
1524	60,00	52J1625MR
1599	62,95	52J1700MR

Section 52 x 16

Inner length (inch)	Inner length (inch)	ROULUNDS Number
1724	67,87	52J1825MR
1924	75,75	52J2025MR
2164	85,20	52J2265MR
2424	95,43	52J2525MR
2724	107,24	52J2825MR
* 3074	121,02	52J3175MR

Section 55 x 16

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 999	39,33	55J1100MR
* 1099	43,27	55J1200MR
* 1119	44,06	55J1220MR
1149	45,24	55J1250MR
1179	46,42	55J1280MR
1249	49,17	55J1350MR
* 1285	50,59	55J1386MR
1319	51,93	55J1420MR
1399	55,08	55J1500MR
1499	59,02	55J1600MR
1599	62,95	55J1700MR
1699	66,89	55J1800MR
1799	70,83	55J1900MR
1899	74,76	55J2000MR
1999	78,70	55J2100MR
* 2119	83,43	55J2200MR
2139	84,21	55J2220MR
2239	88,15	55J2340MR
* 2359	92,87	55J2460MR
2499	98,39	55J2600MR
2799	110,20	55J2900MR
3149	123,98	55J3250MR

Section 58 x 17

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 1500	59,06	58J1610NR
* 1600	62,99	58J1710NR
* 1700	66,93	58J1810NR
* 1800	70,87	58J1910NR
* 2500	98,43	58J2610NR

Section 65 x 20

Inner length (inch)	Inner length (inch)	ROULUNDS Number
1506	59,29	65K1632SR
1706	67,17	65K1832SR
1906	75,04	65K2032SR
2146	84,49	65K2272SR
2406	94,72	65K2532SR
* 2706	106,54	65K2832SR
* 3056	120,31	65K3182SR
* 3456	136,06	65K3582SR
* 3906	153,78	65K4032SR

Section 70 x 18

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 1097	43,19	70K1210PR
* 1197	47,13	70K1310PR
* 1242	48,90	70K1355PR
* 1317	51,85	70K1430PR
* 1386	54,57	70K1496PR
1397	55,00	70K1510PR
1455	57,28	70K1558PR





ROFLEX-VARI Raw-Edge Cogged Belts

Section 70 x 18

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 1455	57,28	70K1568PR
1497	58,94	70K1610PR
* 1512	59,53	70K1625PR
1597	62,87	70K1710PR
1697	66,81	70K1810PR
1705	67,13	70K1818PR
* 1767	69,57	70K1880PR
1797	70,75	70K1910PR
1897	74,68	70K2010PR
* 1922	75,67	70K2035PR
1997	78,62	70K2110PR
* 2012	79,21	70K2125PR
* 2062	81,18	70K2175PR
* 2117	83,35	70K2230PR
* 2226	87,64	70K2339PR
2237	88,07	70K2350PR
* 2357	92,80	70K2470PR
2387	93,98	70K2500MR
* 2497	98,31	70K2610PR
* 2531	99,65	70K2644PR
* 2637	103,82	70K2750PR
2797	110,12	70K2910PR
* 3057	120,35	70K3170PR
3147	123,90	70K3260PR
* 3257	128,23	70K3370PR

Section 98 x 23

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 1692	66,61	98P1802VR
* 1855	73,03	98N1950VR



Section 70 x 20

Inner length (inch)	Inner length (inch)	ROULUNDS Number
1444	56,85	70K1570SR
* 1499	59,02	70K1625SR
* 1599	62,95	70K1725SR
1699	66,89	70K1825SR
1799	70,83	70K1925SR
1999	78,70	70K2125SR
2239	88,15	70K2365SR
2499	98,39	70K2625SR
2799	110,20	70K2925SR

Section 72 x 20

Inner length (inch)	Inner length (inch)	ROULUNDS Number
* 3150	124,02	72K3275SR

Section 83 x 23

Inner length (inch)	Inner length (inch)	ROULUNDS Number
1691	66,57	83L1836VR
1755	69,09	83L1900VR
1891	74,45	83L2036VR
* 2110	83,07	83K2255VR
* 2131	83,90	83L2276VR
* 2391	94,13	83L2536VR
* 2691	105,94	83L2836VR
* 3041	119,72	83L3186VR
* 3441	135,47	83L3586VR
* 3450	135,83	83L3595VR
* 3700	145,67	83L3845VR
* 3891	153,19	83L4036VR



CROSS-LIST RMA Notation - ROULUNDS Number

RMA Notation	ROULUNDS Number	RMA Notation	ROULUNDS Number	RMA Notation	ROULUNDS Number
1422 V 172	22H0450DR	2322 V 390	37J1010FR	3230 V 557	52J1440MR
1422 V 172	22H0450DR	2322 V 410	37J1060FR	3230 V 580	52J1500MR
1422 V 192	22H0450DR	2322 V 435	37J1120FR	3230 V 630	52J1625MR
1422 V 192	22H0450DR	2322 V 458	37J1180FR	3230 V 660	52J1700MR
1422 V 205	22H0535DR	2322 V 482	37J1240FR	3230 V 710	52J1825MR
1422 V 212	22H0550DR	2322 V 487	37J1252FR	3230 V 787	52J2025MR
1422 V 220	22H0575DR	2322 V 510	37J1310FR	3230 V 882	52J2265MR
1422 V 230	22H0600DR	2322 V 537	37J1380FR	3230 V 985	52J2525MR
1422 V 240	22H0625DR	2322 V 570	37J1460FR	3230 V 1102	52J2825MR
1422 V 250	22H0650DR	2322 V 608	37J1560FR	3230 V 1240	52J3175MR
1422 V 255	22H0660DR	2322 V 647	37J1660FR	4436 V 505	70K1310PR
1422 V 260	22H0675DR	2322 V 660	37J1695FR	4436 V 530	70K1374PR
1422 V 270	22H0700DR	2322 V 687	37J1760FR	4436 V 552	70K1430PR
1422 V 280	22H0725DR	2322 V 725	37J1860FR	4436 V 583	70K1510PR
1422 V 290	22H0750DR	2322 V 765	37J1960FR	4436 V 605	70K1568PR
1422 V 300	22H0775DR	2322 V 805	37J2060FR	4436 V 623	70K1610PR
1422 V 310	22H0800DR	2322 V 825	37J2113FR	4436 V 662	70K1710PR
1422 V 320	22H0825DR	2322 V 830	37J2125FR	4436 V 700	70K1810PR
1422 V 330	22H0850DR	2322 V 852	37J2180FR	4436 V 730	70K1882PR
1422 V 340	22H0875DR	2322 V 875	37J2240FR	4436 V 740	70K1910PR
1422 V 350	22H0900DR	2322 V 900	37J2300FR	4436 V 780	70K2010PR
1422 V 370	22H0950DR	2322 V 1002	37J2560FR	4436 V 780	70K2013PR
1422 V 390	22H1000DR	2322 V 1120	37J2860FR	4436 V 820	70K2110PR
1422 V 408	22H1050DR	2926 V 340	47J0880HR	4436 V 845	70K2175PR
1422 V 432	22H1110DR	2926 V 360	47J0930HR	4436 V 860	70K2213PR
1422 V 455	22H1170DR	2926 V 370	47J0955HR	4436 V 867	70K2230PR
1422 V 480	22H1230DR	2926 V 378	47J0980HR	4436 V 910	70K2339PR
1422 V 497	22H1275DR	2926 V 398	47J1030HR	4436 V 915	70K2350PR
1422 V 507	22H1300DR	2926 V 418	47J1080HR	4436 V 1015	70K2610PR
1422 V 535	22H1370DR	2926 V 430	47J1110HR	4436 V 1030	70K2644PR
1422 V 565	22H1450DR	2926 V 440	47J1140HR	4436 V 1135	70K2910PR
1422 V 605	22H1550DR	2926 V 465	47J1200HR	4436 V 1272	70K3260PR
1422 V 645	22H1650DR	2926 V 475	47J1225HR	4436 V 1418	70K3630PR
1422 V 660	22H1690DR	2926 V 490	47J1260HR	4436 V 605	70K1570SR
1422 V 685	22H1750DR	2926 V 495	47J1275HR	4436 V 667	70K1725SR
1422 V 723	22H1850DR	2926 V 515	47J1330HR	4436 V 705	70K1825SR
1422 V 1000	22H2550DR	2926 V 525	47J1350HR	4436 V 745	70K1925SR
1922 V 262	30H0680FR	2926 V 545	47J1400HR	4436 V 825	70K2125SR
1922 V 275	30H0713FR	2926 V 575	47J1480HR	4436 V 920	70K2365SR
1922 V 315	30H0818FR	2926 V 590	47J1515HR	4436 V 1020	70K2625SR
1922 V 335	30H0863FR	2926 V 615	47J1580HR	4436 V 1140	70K2925SR
1922 V 365	30H0940FR	2926 V 640	47J1645HR		
1922 V 373	30H0963FR	2926 V 655	47J1680HR		
1922 V 383	30H0988FR	2926 V 670	47J1720HR		
1922 V 393	30H1013FR	2926 V 693	47J1780HR		
1922 V 405	30H1048FR	2926 V 710	47J1820HR		
1922 V 412	30H1063FR	2926 V 733	47J1880HR		
1922 V 440	30H1135FR	2926 V 722	47J1980HR		
1922 V 453	30H1167FR	2926 V 780	47J2000HR		
1922 V 460	30H1183FR	2926 V 810	47J2080HR		
1922 V 482	30H1241FR	2926 V 860	47J2200HR		
1922 V 545	30H1400FR	2926 V 895	47J2290HR		
1922 V 583	30H1496FR	2926 V 905	47J2320HR		
1922 V 600	30H1537FR	2926 V 930	47J2380HR		
1922 V 605	30H1555FR	2926 V 953	47J2440HR		
1922 V 688	30H1763FR	2926 V 970	47J2480HR		
1922 V 727	30H1863FR	2926 V 1005	47J2575HR		
1922 V 750	30H1920FR	2926 V 1008	47J2580HR		
2322 V 255	37J0660FR	2926 V 1120	47J2860HR		
2322 V 273	37J0710FR	2926 V 1125	47J2880HR		
2322 V 283	37J0735FR	3226 V 597	50J1538KR		
2322 V 293	37J0760FR	3226 V 623	50J1605KR		
2322 V 303	37J0785FR	3226 V 925	50K2374KR		
2322 V 313	37J0810FR	3230 V 495	52J1280MR		
2322 V 332	37J0860FR	3230 V 522	52J1350MR		
2322 V 340	37J0880FR	3230 V 533	52J1380MR		
2322 V 352	37J0910FR	3230 V 549	52J1420MR		
2322 V 372	37J0960FR	3230 V 551	52J1425MR		



CROSS-LIST ISO Notation - ROULUNDS Number



ISO Notation	ROULUNDS Number
W 16 440	17H0448BR
W 16 480	17H0490BR
W 16 500	17H0508BR
W 16 530	17H0540BR
W 16 560	17H0568BR
W 16 580	17H0590BR
W 16 600	17H0608BR
W 16 630	17H0640BR
W 16 680	17H0690BR
W 16 730	17H0740BR
W 16 780	17H0790BR
W 16 800	17H0808BR
W 16 830	17H0840BR
W 16 880	17H0890BR
W 16 900	17H0908BR
W 16 930	17H0940BR
W 16 1030	17H1040BR
W 16 1080	17H1090BR
W 16 1130	17H1140BR
W 16 1180	17H1190BR
W 16 1230	17H1240BR
W 16 1280	17H1290BR
W 20 560	21H0570BR
W 20 630	21H0640BR
W 20 710	21H0720BR
W 20 800	21H0810BR
W 20 900	21H0910BR
W 20 1000	21H1010BR
W 20 1120	21H1130BR
W 20 1250	21H1260BR
W 25 560	26H0572DR
W 25 630	26H0642DR
W 25 710	26H0722DR
W 25 745	26H0760DR
W 25 785	26H0800DR
W 25 800	26H0812DR
W 25 835	26H0850DR
W 25 885	26H0900DR
W 25 900	26H0912DR
W 25 935	26H0950DR
W 25 1000	26H1012DR
W 25 1035	26H1050DR
W 25 1120	26H1132DR
W 25 1155	26H1170DR
W 25 1250	26H1262DR
W 25 1400	26H1412DR
W 25 1600	26H1612DR
W 31,5 800	32H0813FR
W 31,5 840	32H0853FR
W 31,5 870	32H0883FR
W 31,5 900	32H0913FR
W 31,5 950	32H0963FR
W 31,5 1000	32H1013FR
W 31,5 1050	32H1063FR
W 31,5 1120	32H1136FR
W 31,5 1170	32H1183FR
W 31,5 1230	32H1243FR
W 31,5 1250	32H1266FR
W 31,5 1300	32H1313FR
W 31,5 1450	32H1463FR
W 31,5 1600	32H1616FR
W 31,5 1650	32H1663FR
W 31,5 1800	32H1813FR
W 31,5 2000	32H2016FR
W 40 955	42J0975HR
W 40 1000	42J1013HR
W 40 1060	42J1075HR
W 40 1120	42J1139HR

ISO Notation	ROULUNDS Number
W 40 1180	42J1195HR
W 40 1250	42J1269HR
W 40 1305	42J1325HR
W 40 1400	42J1419HR
W 40 1455	42J1475HR
W 40 1500	42J1519HR
W 40 1600	42J1619HR
W 40 1655	42J1675HR
W 40 1755	42J1775HR
W 40 1855	42J1875HR
W 40 2000	42J2019HR
W 40 2055	42J2075HR
W 40 2240	42J2259HR
W 40 2500	42J2519HR
W 50 1120	52J1145MR
W 50 1250	52J1280MR
W 50 1400	52J1425MR
W 50 1600	52J1625MR
W 50 1675	52J1700MR
W 50 1800	52J1825MR
W 50 2000	52J2025MR
W 50 2240	52J2265MR
W 50 2500	52J2525MR
W 50 2800	52J2825MR
W 50 3150	52J3175MR
W 63 1600	58J2610NR
W 63 1800	65K1832SR
W 63 2000	65K2032SR
W 63 2240	65K2272SR
W 63 2500	65K2532SR
W 63 2800	65K2832SR
W 63 3150	65K3182SR
W 63 3550	65K3582SR
W 63 4000	65K4032SR
W 80 1800	83L1836VR
W 80 2000	83L2036VR
W 80 2240	83L2276VR
W 80 2500	83L2536VR
W 80 2800	83L2836VR
W 80 3150	83L3186VR
W 80 3550	83L3586VR
W 80 4000	83L4036VR



The content of this publication is provided for information only and without responsibility.

ContiTech Roulunds Rubber A/S's obligations and responsibilities regarding its products are governed solely by the agreements under which they are sold. Unless otherwise agreed in writing, the information contained herein does not become part of these agreements. This publication does not contain any guarantee or agreed quality of ContiTech Roulunds Rubber A/S's products or any warranty of merchantability, fitness for a particular purpose and non-infringement. ContiTech Roulunds Rubber A/S may make changes in the products or services described at any time without notice.

This publication is provided on an "as is" basis. To the extent permitted by law, ContiTech Roulunds Rubber A/S makes no warranty, express or implied, and assumes no liability in connection with the use of the information contained in this publication. ContiTech Roulunds Rubber A/S is not liable for any direct, indirect, incidental, consequential or punitive damages arising out of the use of this publication. Information contained herein is not intended to announce product availability anywhere in the world.

Copyright © 2008 ContiTech Roulunds Rubber A/S. All rights reserved.